


Size <ligne>	13 ½'''
Height <mm>	5.10
Accuracy <per Month>	±20 sec
Battery Life	2 years


*60 minutes chronograph operation per day

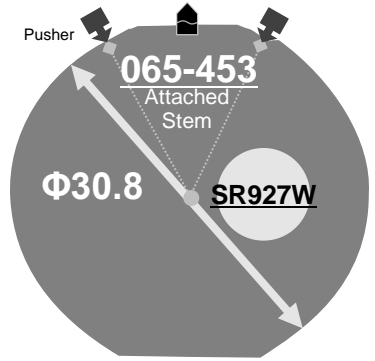

Battery consumption could be minimum by pulling out the stem

Balance Weight < μ N.m>	Minute 0.40 Chrono Second 0.11 Small 0.02
---------------------------------------	---

Featured by Shock Detection



Clearance	<p>Diagram showing the clearance between the hand and the case. The clearance is labeled as 0.30-0.45mm. The movement is labeled as 0.15-0.40mm.</p>
------------------	--

Clearance changes subject to the glass, case structure, and the length of the hand.

Original Package	500pcs
-------------------------	--------

Time measurement

Accuracy

The unit (gate) time of measurement must be set at "10 sec." and the measurement must be performed in the form of complete watch.



Push "A"

Start and Stop the chronograph

Setting the Time

Set CHRONOGRAPH hands to reset

Push A to reset the hands position to the ZERO position. And continue to push A to put them forward

Setting the Date

DO NOT set Date between 9:00pm - 1:00am

Push "B"

Reset the chronograph