


# Cal. 6P88 Instruction manual

# FEATURES: ANALOG MULTI-HAND QUARTZ WATCH WITH DAY, 24 HOUR AND MONTH

- A) DISPLAY AND BUTTON
- **B) OPERATION PROCEDURE**
- C) SETTING THE DAY AND TIME (HOUR, 24 HOUR, MINUTE, SECOND)
- D) SETTING THE MONTH (BY QUICK OPERATION)

# A) DISPLAY AND BUTTON

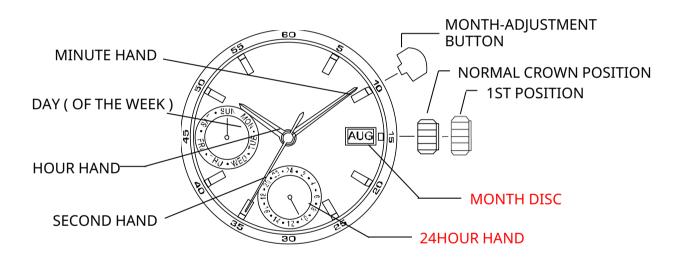

NORMAL CROWN POSITION 1ST POSITION

TIME/DAY SETTING (CLOCKWISE)

# **B) OPERATION PROCEDURE**

1 SETTING THE DAY


SETTING THE TIME (HOUR, 24HOUR, MINUTE and SECOND)

2 SETTING THE MONTH

# C) SETTING THE DAY AND TIME (HOUR, 24 HOUR, MINUTE AND SECOND)

The hour, 24 hour, minute, second and day are set by the same operation.

### SETTING PROCEDURE



# C-1) SETTING THE DAY

Pull the crown out to the 1st position to stop the second hand at 0 (12 o'clock).

Turn the hour/minute hands in a **clockwise** direction to set a day

In order to set the day, you must advance the hour hand by 24 hours per day.

## NOTE:

Do not set the day by turning the crown in counterclockwise direction.

\* The day changes somewhere between 0:00a.m. and 5:30a.m. or a little later.

# C-2) SETTING THE TIME

# After setting the day, set the hour (and 24hour) and minute hands.

Turn the hour/minute hands in a **clockwise** direction to set the time.

To ensure time is set accurately, first turn the minute hand 5 minutes ahead of desired time and then turn back (in a counterclockwise) to the desired time.

After setting the time, use a time signal to synchronize the watch by pushing crown to the normal position to start the second hand going.

#### NOTE:

Make sure you have correctly set AM/PM before setting the time.

When the day changes over, it is a.m..

(Day changes over between 0:00a.m. and 5:30a.m. or little later)

Check am./p.m. by the 24hour hand.

# D) SETTING THE MONTH (BY QUICK OPERATION)

Each time the month-adjustment button is pushed, the month advances one month at a time. Be sure to press firmly on the button when making month changes.

# NOTE:

The month disc changes around midnight of the 31st..

These specifications might be changed without prior notice.