

6T28

MIYOTA

Size
<ligne> **8 3/4"**

Height
<mm> **5.23**


Accuracy
<per Day> **-20~+40 sec**

Posture Difference
(under) **50 sec**

Running time
(more than) **40 hours**

Vibration Frequency
<per Hour> (vibration) **28800**

Clearance
Clearance changes subject to the glass, case structure, and the length of the hand.





Jewels
21 pcs

Lift Angle
50 degree

Original Package
300 pcs

The option parts
- Thinner holder (502-144)
- Casing clamps (082-070)
- Screws (923-140)

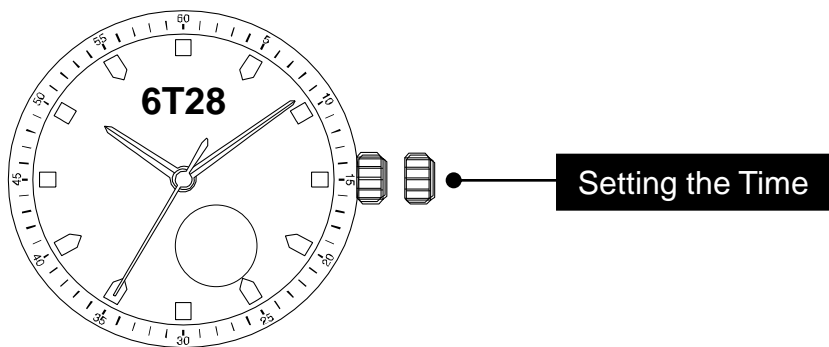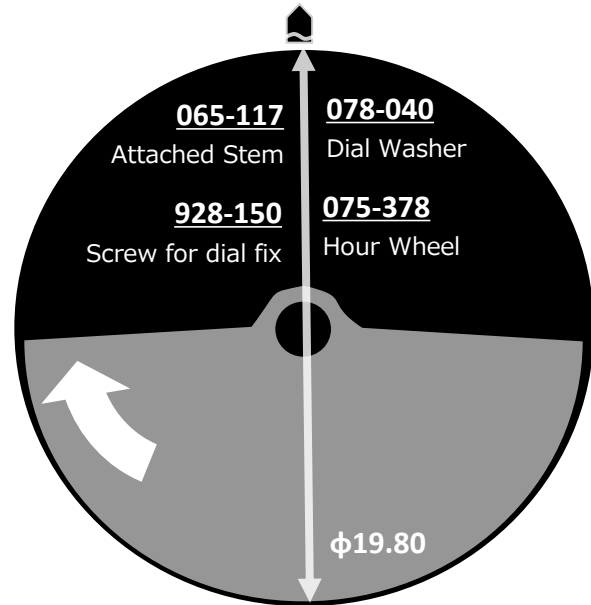

Time measurement & Winding





Mechanical

Accuracy

Measure within lapse of 10 ~ 60 minutes from full winding with ① posture.

Posture difference

Measure accuracy in below ① ~ ④ postures.

① Dial side up	①	②	③	④
② 6 o'clock side up				
③ 9 o'clock side up				
④ 3 o'clock side up				

■ **To make full-winded**

90 / 91	Turn the crown 40 times
82 / 8N	Turn the crown 40 times
6T	Turn the crown 20 times

■ **Winding direction**

