

**Size**  
<ligne> **11 ½”**

**Height**  
<mm> **5.67**


**Accuracy**  
<per Day> **-20~+40 sec**

**Posture Difference**  
(under) **50 sec**

**Running time**  
**42 hours**

**Vibration Frequency**  
<per Hour> (vibration) **21600**

**Clearance**  
Clearance changes subject to the glass, case structure, and the length of the hand.

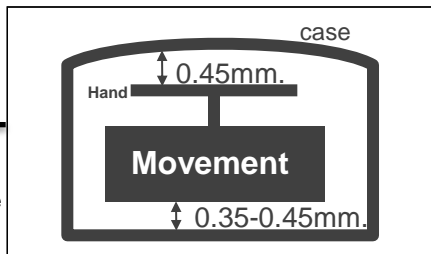


**Jewels**  
**21 pcs**

**Lift Angle**  
**49 degree**

**Original Package**  
**300 pcs**

Exchangeable with the following option parts  
 - Metal ring(502-008)  
 - Casing clamps (082-060)  
 - Screws (924-460)

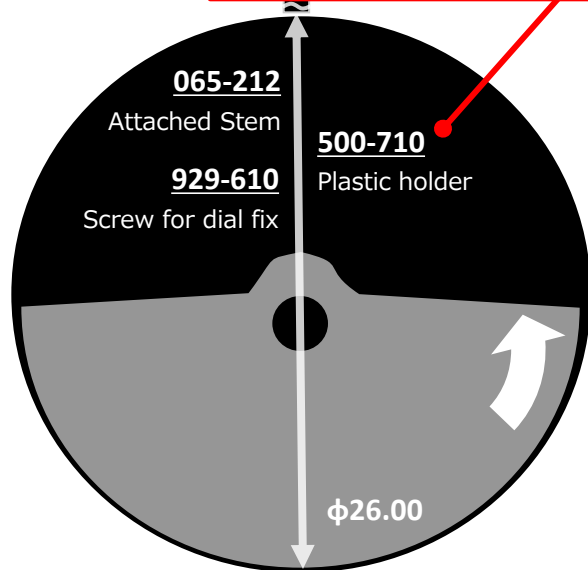


**Gilt Version Available**

**SUN**  
Day

**7**  
Date

8215	821A
8205	820A

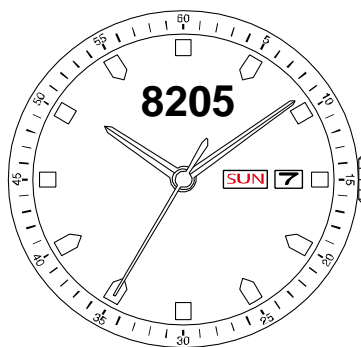

Setting the Time

Setting the Date and Day

DO NOT set Date between 9:00pm – 1:00am  
 DO NOT set Day between 1:00am – 4:30am



Fine finishing with  
 - barrel bridge  
 - screws

**Time measurement & Winding**





**Mechanical**

**Accuracy**

Measure within lapse of 10 ~ 60 minutes from full winding with ① posture.

**Posture difference**

Measure accuracy in below ① ~ ④ postures.

① Dial side up	①	②	③	④
② 6 o'clock side up				
③ 9 o'clock side up				
④ 3 o'clock side up				

■ **To make full-winded**

90 / 91	Turn the crown 40 times
82 / 8N	Turn the crown 40 times
6T	Turn the crown 20 times

■ **Winding direction**

