

# 8217

# MIYOTA

**Size**  
<ligne> 11 1/2'''

**Height**  
<mm> 5.67


**Accuracy**  
<per Day> -20~+40 sec

**Posture Difference**  
(under) 50 sec

**Running time**  
42 hours

**Vibration Frequency**  
<per Hour> (vibration) 21600

**Clearance**  
Clearance changes subject to the glass, case structure, and the length of the hand.




**Jewels**  
21 pcs


**Lift Angle**  
49 degree

**Original Package**  
300 pcs

Exchangeable with the following option parts  
- Metal ring(502-008)  
- Casing clamps (082-060)  
- Screws (924-460)

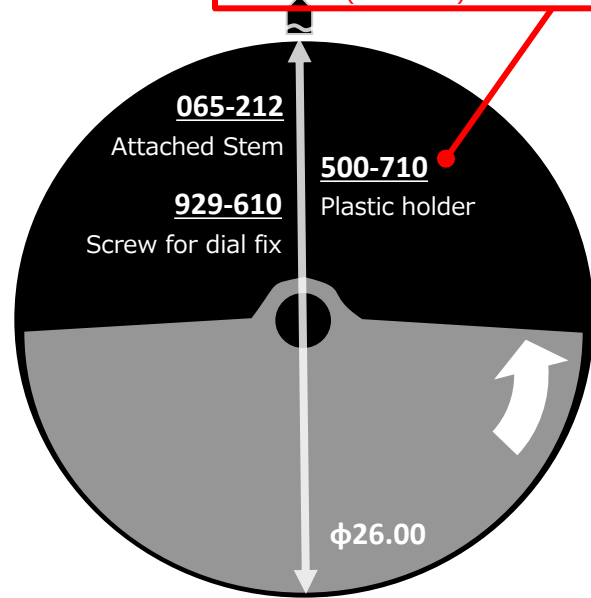

**Gilt Version Available**



Fine finishing with  
- barrel bridge  
- screws



Setting the Time

Setting the Date

DO NOT set Date between 9:00pm - 1:00am

**Time measurement & Winding**





**Mechanical**

**Accuracy**

Measure within lapse of 10 ~ 60 minutes from full winding with ① posture.

**Posture difference**

Measure accuracy in below ① ~ ④ postures.

① Dial side up	①	②	③	④
② 6 o'clock side up				
③ 9 o'clock side up				
④ 3 o'clock side up				

■ **To make full-winded**

90 / 91	Turn the crown 40 times
82 / 8N	Turn the crown 40 times
6T	Turn the crown 20 times

■ **Winding direction**

