

Size
<ligne> 11 1/2'''

Height
<mm> 5.67


Accuracy
<per Day> -20~+40 sec

Posture Difference
(under) 50 sec

Running time
42 hours

Vibration Frequency
<per Hour> (vibration) 21600

Clearance
Clearance changes subject to the glass, case structure, and the length of the hand.





Jewels
21 pcs


Lift Angle
49 degree

Original Package
300 pcs

Exchangeable with the following option parts
 - Metal ring(502-008)
 - Casing clamps (082-060)
 - Screws (924-460)

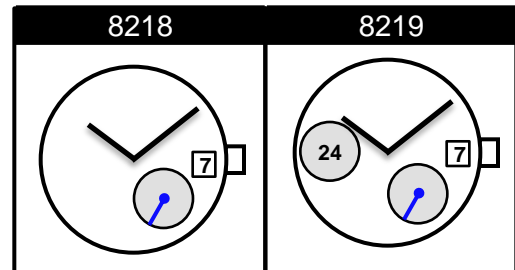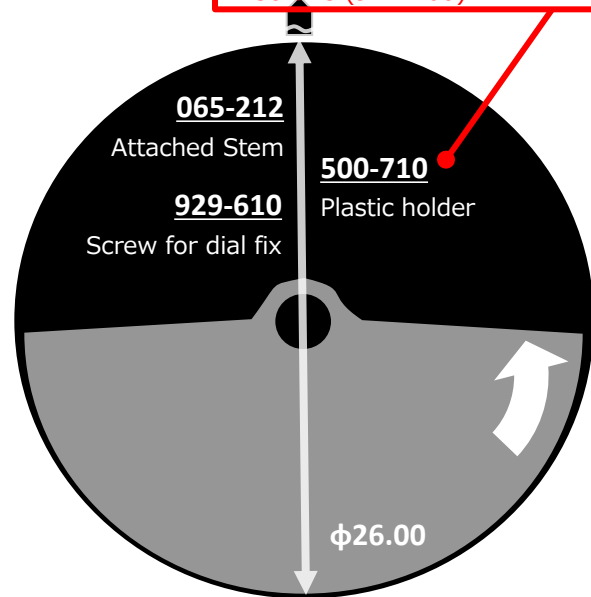

Fine finishing with
 - barrel bridge
 - screws



Setting the Time

Setting the Date

DO NOT set Date between 9:00pm - 1:00am

Time measurement & Winding





Mechanical

Accuracy

Measure within lapse of 10 ~ 60 minutes from full winding with ① posture.

Posture difference

Measure accuracy in below ① ~ ④ postures.

① Dial side up	①	②	③	④
② 6 o'clock side up				
③ 9 o'clock side up				
④ 3 o'clock side up				

■ **To make full-winded**

90 / 91	Turn the crown 40 times
82 / 8N	Turn the crown 40 times
6T	Turn the crown 20 times

■ **Winding direction**

