

Size
<ligne> **11 ½”**

Height
<mm> **5.67**


Accuracy
<per Day> **-20~+40 sec**

Posture Difference
(under) **50 sec**

Running time
42 hours

Vibration Frequency
<per Hour> (vibration) **21600**

Clearance
Clearance changes subject to the glass, case structure, and the length of the hand.

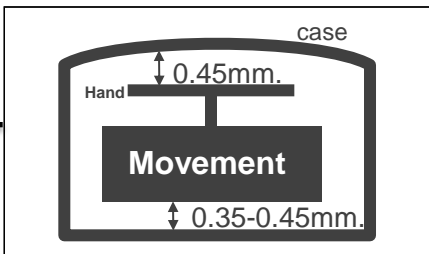


Jewels
21 pcs

Lift Angle
49 degree

Original Package
300 pcs



Exchangeable with the following option parts
- Metal ring(502-008)
- Casing clamps (082-060)
- Screws (924-460)

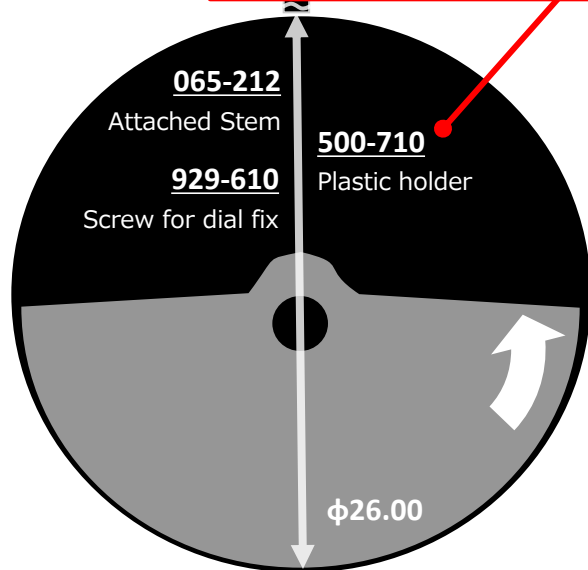

Gilt Version Available

SUN
Day

7
Date

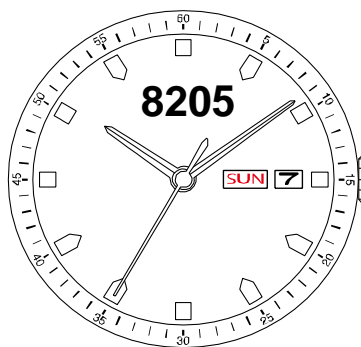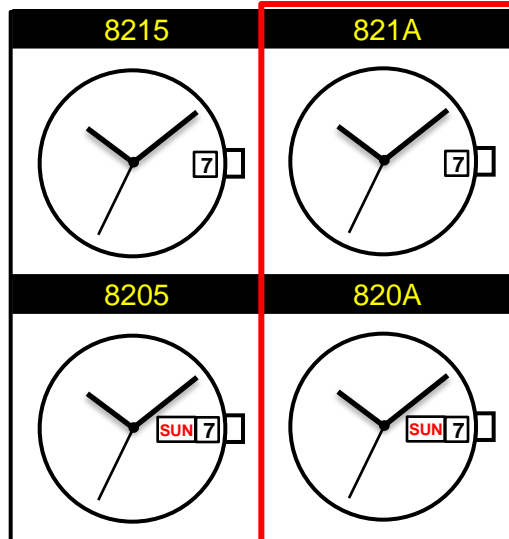

Setting the Time

Setting the Date and Day

DO NOT set Date between 9:00pm – 1:00am
DO NOT set Day between 1:00am – 4:30am



Time measurement & Winding





Mechanical

Accuracy

Measure within lapse of 10 ~ 60 minutes from full winding with ① posture.

Posture difference

Measure accuracy in below ① ~ ④ postures.

| | | | | |
|---------------------|---|---|--|---|
| ① Dial side up | ① | ② | ③ | ④ |
| ② 6 o'clock side up |  |  |  |  |
| ③ 9 o'clock side up | | | | |
| ④ 3 o'clock side up | | | | |

■ **To make full-winded**

| | |
|---------|-------------------------|
| 90 / 91 | Turn the crown 40 times |
| 82 / 8N | Turn the crown 40 times |
| 6T | Turn the crown 20 times |

■ **Winding direction**

