


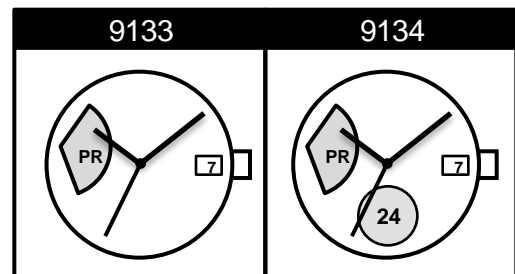


9133 9134

MIYOTA

Size <ligne>	13 ½”
Height <mm>	5.52
Accuracy <per Day>	-10 ~ +30 sec
Posture Difference	(under) 40 sec
Running time	(more than) 40 hours
Vibration Frequency <per Hour>	(vibration) 28800
Clearance	
Jewels	26 pcs
Lift Angle	51 degree
Original Package	100 pcs

Exchangeable with
- casing clamps (082-060)
- screws (924-752)

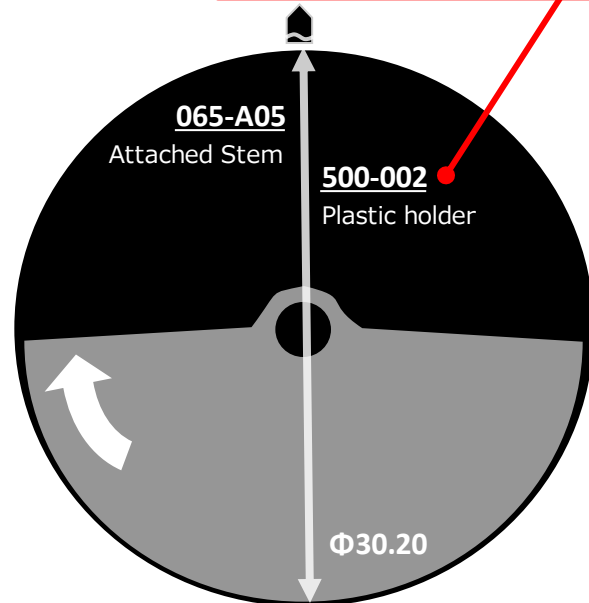

Setting the Time

Setting the Date

DO NOT set Date between 8:30pm - 2:00am

Time measurement & Winding





Mechanical

Accuracy

Measure within lapse of 10 ~ 60 minutes from full winding with ① posture.

Posture difference

Measure accuracy in below ① ~ ④ postures.

① Dial side up	①	②	③	④
② 6 o'clock side up				
③ 9 o'clock side up				
④ 3 o'clock side up				

■ **To make full-winded**

90 / 91	Turn the crown 40 times
82 / 8N	Turn the crown 40 times
6T	Turn the crown 20 times

■ **Winding direction**

