


Size <ligne>	6 ¾ x8'''
Height <mm>	1.90
Accuracy <per Month>	±20 sec
Battery Life	2 years

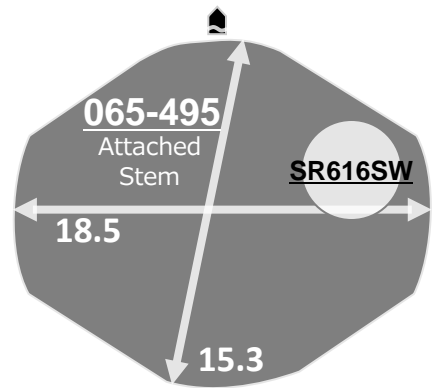


Battery consumption could be minimum by pulling out the stem

Balance Weight <µN.m>	Minute 0.40 Second 0.07
---------------------------------	----------------------------

Clearance Clearance changes subject to the glass, case structure, and the length of the hand.	
---	--

Original Package	1,000pcs
-------------------------	----------


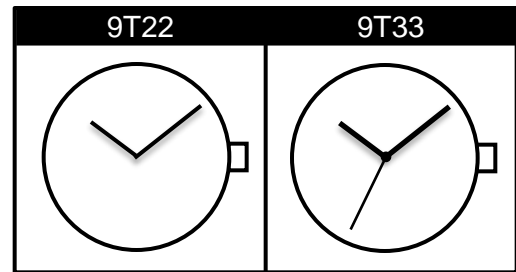


<Battery Detector Function>
As warning second hand steps every 2 seconds
When battery becomes nearly empty.
(except for Cal. 9T22/15&9U15)

Time measurement

Accuracy

The unit (gate) time of measurement must be set at "10 sec." and the measurement must be performed in the form of complete watch.

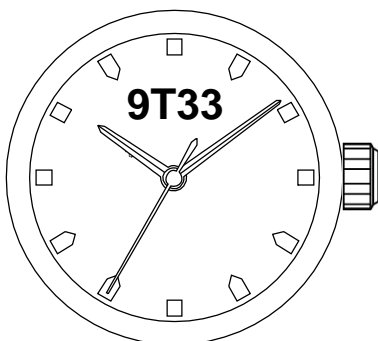

Setting the Time