

|                                |         |
|--------------------------------|---------|
| <b>Size</b><br><ligne>         | 10 ½”   |
| <b>Height</b><br><mm>          | 5.10    |
| <b>Accuracy</b><br><per Month> | ±20 sec |
| <b>Battery Life</b>            | 2 years |

\*60 minutes chronograph operation per day



Battery consumption could be minimum by pulling out the stem

|                                 |   |
|---------------------------------|---|
| <b>Balance Weight</b><br><µN.m> | Minute 0.40<br>Chrono Second 0.08<br>Small 0.02 |
|---------------------------------|---|

Featured by Shock Detection

|                  |   |
|------------------|---|
| <b>Clearance</b> | <p>Hand ↔ 0.30-0.45mm. ↔ case<br/>Movement ↔ 0.20-0.45mm.</p> |
|------------------|---|

|                         |        |
|-------------------------|--------|
| <b>Original Package</b> | 500pcs |
|-------------------------|--------|

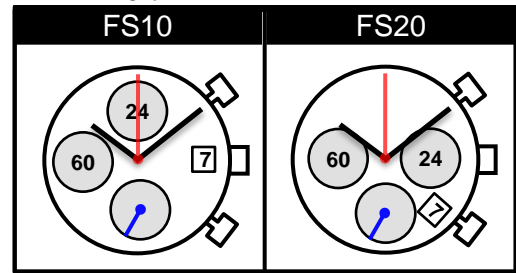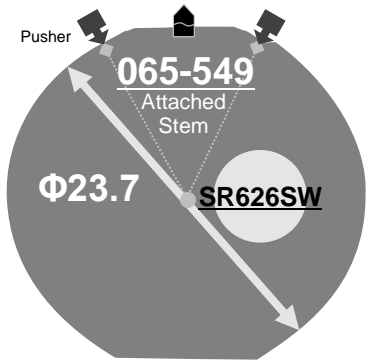


High Hand Ver.  
FS13  
FS23

## Time measurement

### Accuracy

The unit (gate) time of measurement must be set at "10 sec." and the measurement must be performed in the form of complete watch.

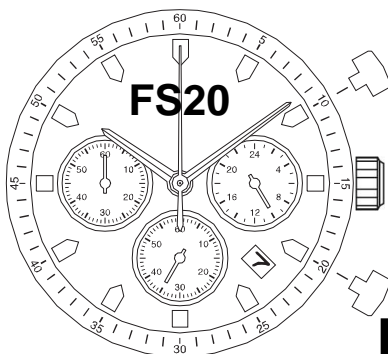

**Push "A"**  
Start and Stop the chronograph

**Setting the Time**

**Set CHRONOGRAPH hands to reset**

Push A to reset the hands position to the ZERO position.  
And continue to push A to put them forward

**Push "B"**  
Reset the chronograph

**Setting the Date**

DQ NOT set Date between  
9:00pm - 1:00am