


Size <ligne>	6 ¾ x 8 '''
Height <mm>	2.28
Accuracy <per Month>	± 20 sec
Battery Life	5 years (GL30 3 years)

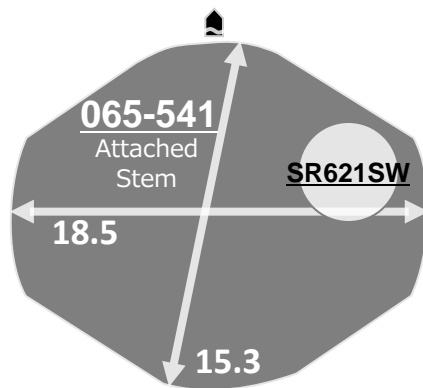

Battery consumption could be minimum by pulling out the stem


Balance Weight <µN.m>	Minute 0.40 Second 0.09
---------------------------------	----------------------------

Featured by Shock Detection

Clearance	
------------------	--

Clearance changes subject to the glass, case structure, and the length of the hand.

Original Package	1,000pcs
-------------------------	----------

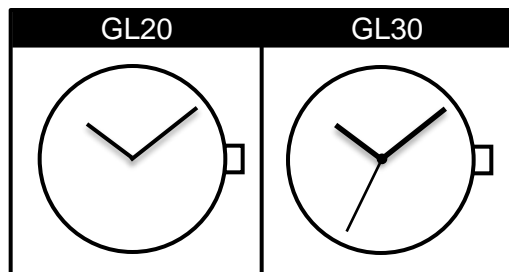


High Hand Ver.
GL26
GL36

Assembled Hour Wheel
Dust Proof
Covered Coil
Super Quick Date Adjusting
Easy Assembling on Flat Desk

Time measurement

Accuracy

The unit (gate) time of measurement must be set at "10 sec." and the measurement must be performed in the form of complete watch.

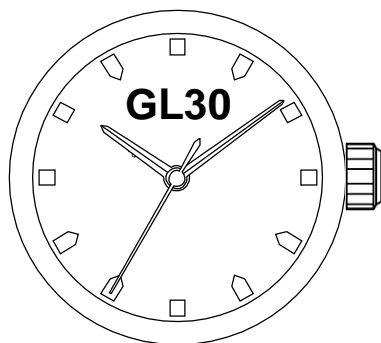

Setting the Time