

Size <ligne>	12 ½”
Height <mm>	4.30
Accuracy <per Month>	±20 sec
Battery Life	2 years

*60 minutes chronograph operation per day



Battery consumption could be minimum by pulling out the stem

Balance Weight <µN.m>	Minute 0.40 Second 0.09 Small 0.02
---------------------------------	--

Featured by Shock Detection

Clearance	
Clearance changes subject to the glass, case structure, and the length of the hand.	

Original Package	500pcs
-------------------------	--------

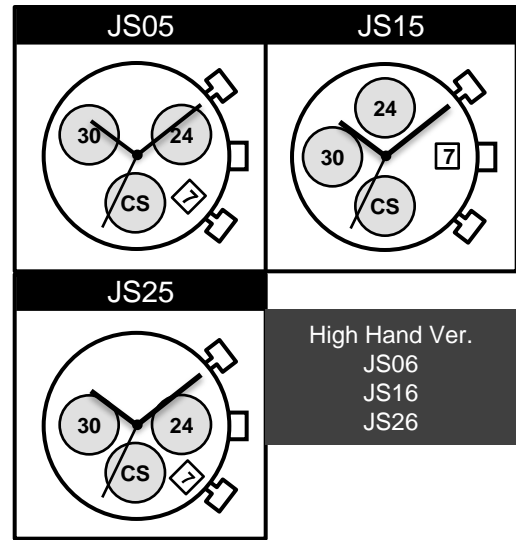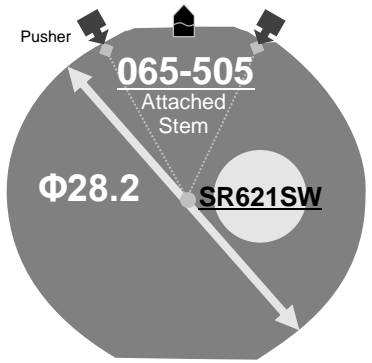

High Hand Ver.
JS06
JS16
JS26

Time measurement

Accuracy

The unit (gate) time of measurement must be set at "10 sec." and the measurement must be performed in the form of complete watch.



Push "A"
Start and Stop the chronograph

Setting the Time

Set CHRONOGRAPH hands to reset

Push A to reset the hands position to the ZERO position, And continue to push A to put them forward

Push "B"
Reset the chronograph

Setting the Date
DO NOT set Date between 9:00pm - 1:00am