

<b>Size</b> <ligne>	12 ½”
<b>Height</b> <mm>	4.18
<b>Accuracy</b> <per Month>	±20 sec
<b>Battery Life</b>	2 years

\*30 minutes chronograph operation per day

Battery consumption could be minimum by pulling out the stem

<b>Balance Weight</b> <µN.m>	Minute 0.40 Second 0.09 Small 0.02
---------------------------------	--

Featured by Shock Detection


<b>Clearance</b>	
Clearance changes subject to the glass, case structure, and the length of the hand.	

<b>Original Package</b>	500pcs
-------------------------	--------

**Time measurement**

**Accuracy**

The unit (gate) time of measurement must be set at "10 sec." and the measurement must be performed in the form of complete watch.

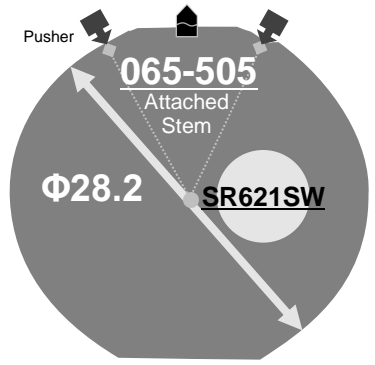

<b>JS00</b>	<b>JS10</b>
<b>JS20</b>	Parallel Push Button Available
<b>JS50</b>	<b>JS55</b>

**Push "A"**  
Start and Stop the chronograph

**Setting the Date**

**Set CHRONOGRAPH hands to reset**

**Push "B"**  
Reset the chronograph

Push A to reset the hands position to the ZERO position, And continue to push A to put them forward