



DH1~DH2= 16171 (±20)

Coordinates

Mark	X	Y	R
GM	0	0	—
f 28	3957	7049	1500
DH1	-7900	-3000	—
DH2	8234	-1900	—
a 1	-7569	-3828	300
a 2	-7252	-4215	200
a 3	-5914	-5092	200
a 4	-5433	-5228	300
a 5	-3437	-6383	400
a 6	2156	-6922	400
a 7	4625	-5757	300
a 8	5106	-5621	200
a 9	6444	-4745	200
a 10	6761	-4358	300

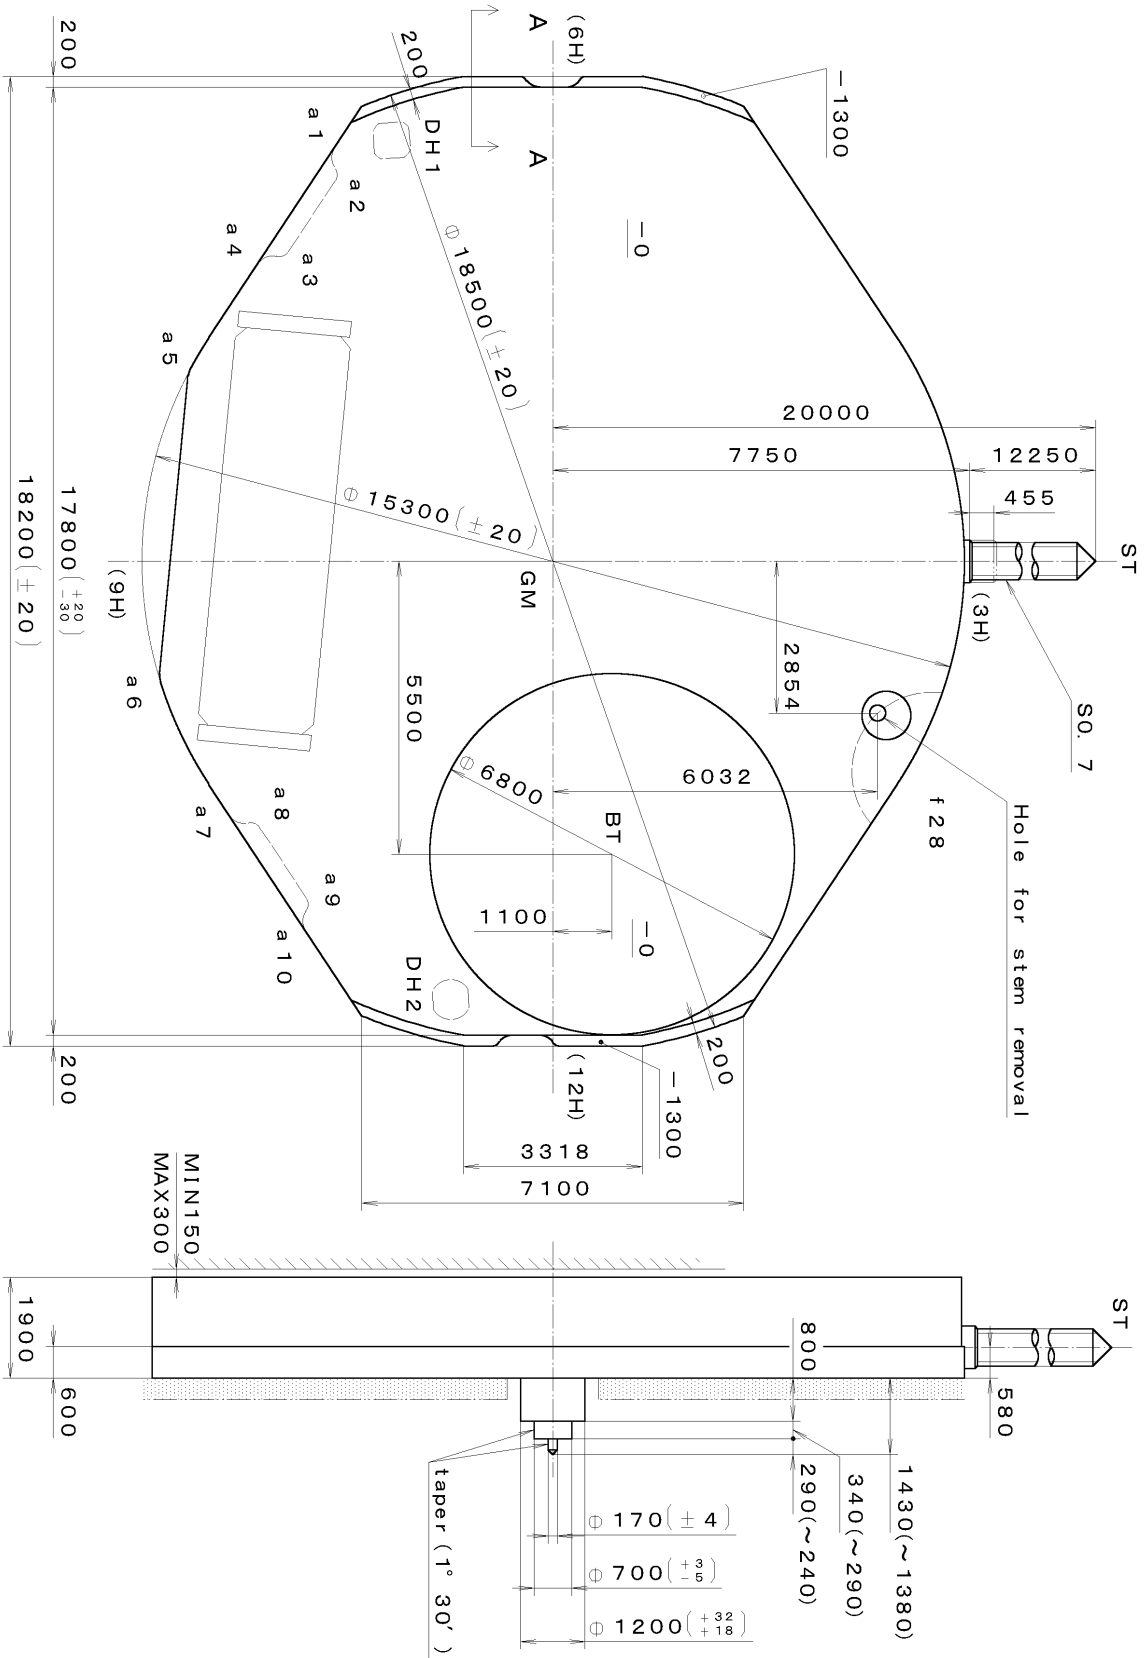


Hook




Section a1~4

Hook




Section a7~10

Hook



Section f28

1300



Section A-A


Basement metal

Material	Quantity	Unit	Cal. No. : 9T33
Heat Treatment	1/1000 mm	Scale	Parts :
Hardness	10:1	Date	
Plating	Drawn	Checked	Name : F frame for Case
	Approved	Checked	Drawing No. : 9T33C001
		Checked	
		Approved	
General Tolerances			
Dimensions			
Angles			

MIYOTA

This drawing is provisional and subject to our reconfirmation and/or revision without notice.


9T33-00A (01) *** (2100 1121) 00-06-22

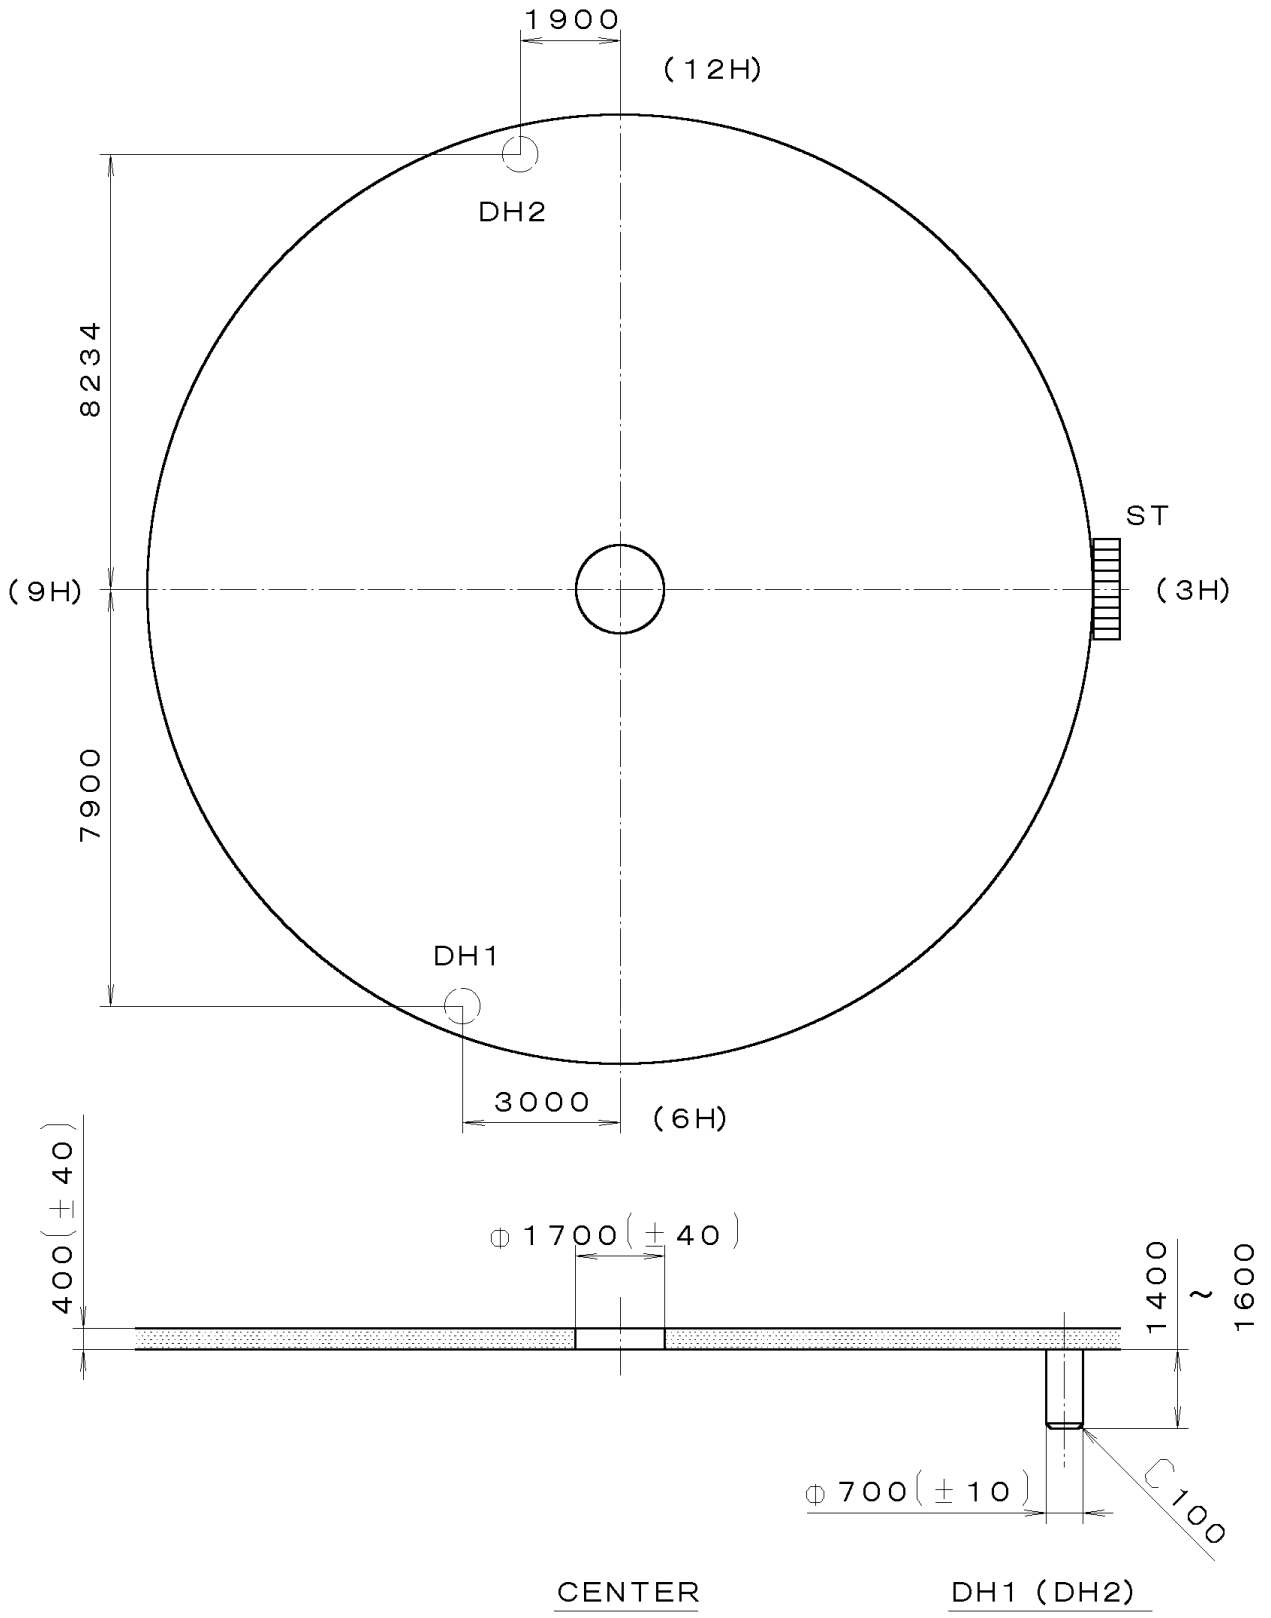

7		Quantity		Cal. No. :	9T33-00A
6		Unit	1/1000 mm	Parts:	
5		Scale	7:1	Name:	Indications for Dial
4		Date		Drawing No. :	9T33D000
3		Drawn		MIYOTA	
2		Checked	T. Hiruta		
1		Approved			
Material					
Heat Treatment		General Tolerances			
Hardness		Dimensions			
Plating		Angles			

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

*** T I P W (01) *** (2100 1121 A-01 A-01) 00-06-22 065-495

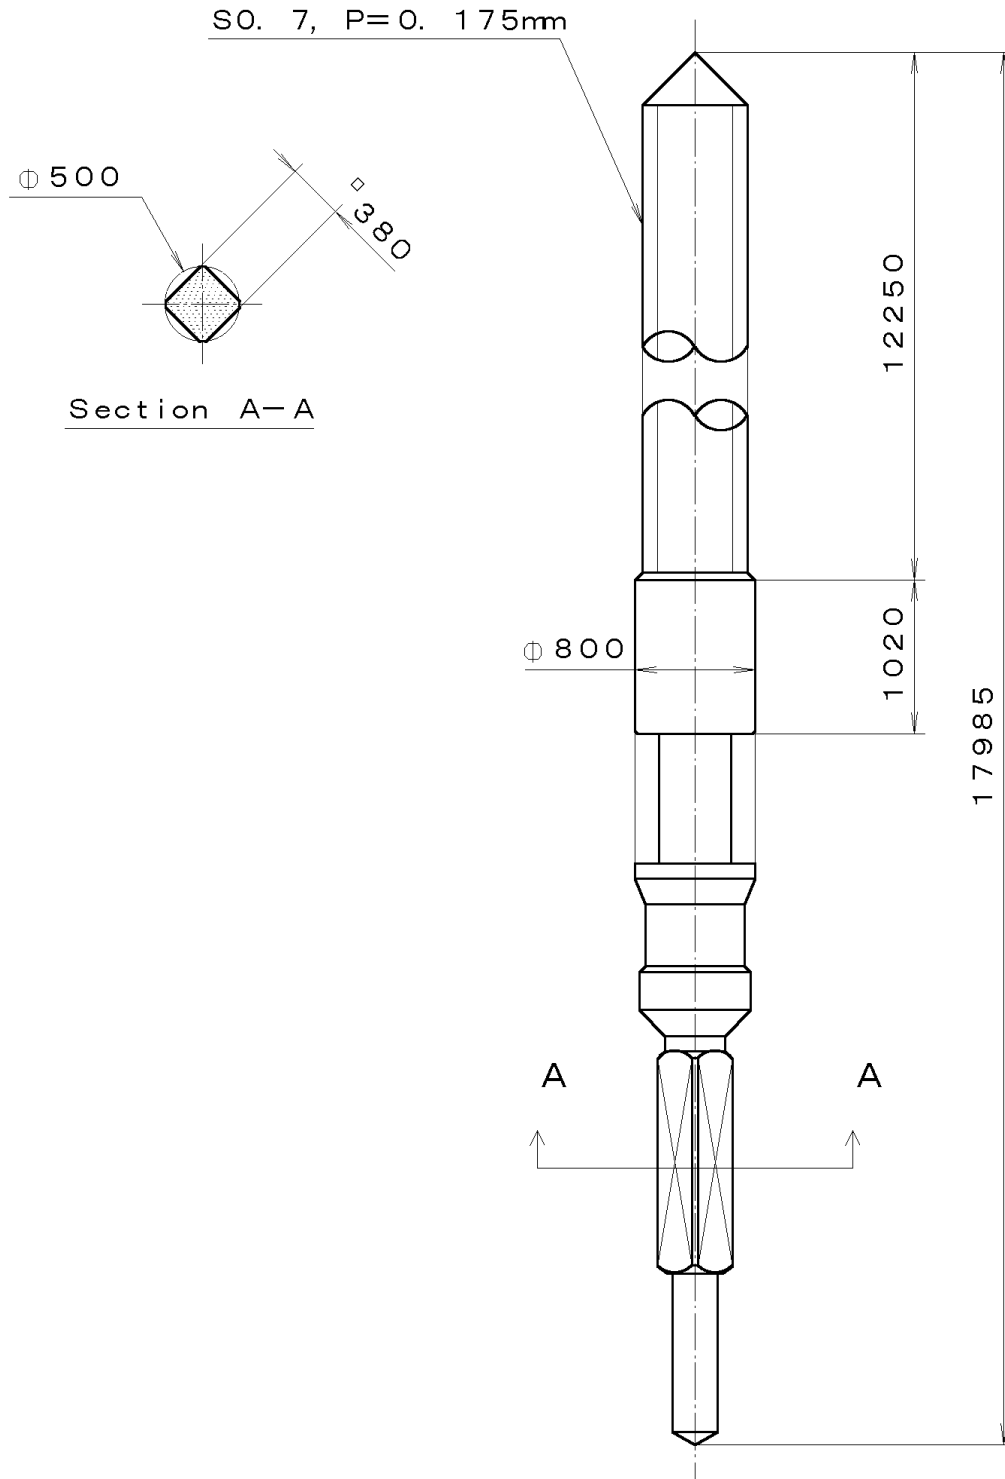

7		Quantity		Ca l. No. :
6		Unit	1/1000 mm	
5		Scale	20:1	Parts:
4		Date		065-495
3		Drawn		
2		Checked	T. Hiruta	Name:
1		Approved		SETTING STEM
Material		SuS420F-DG		Drawing No. : 4950S000
Heat Treatment		焼入焼戻		MIYOTA
Hardness		HV550		
Plating				
		General Tolerances		
		Dimensions		
		Angles		