


82D7


MIYOTA

Size <ligne>	11 ½'''
Height <mm>	5.67
Accuracy <per Day>	-20 ~ +40 sec
Posture Difference	(under) 50 sec
Running time	(more than) 40 hours
Vibration Frequency <per Hour>	(vibration) 21600
Clearance	
Jewels	21 pcs
Lift Angle	49 degree
Original Package	300 pcs

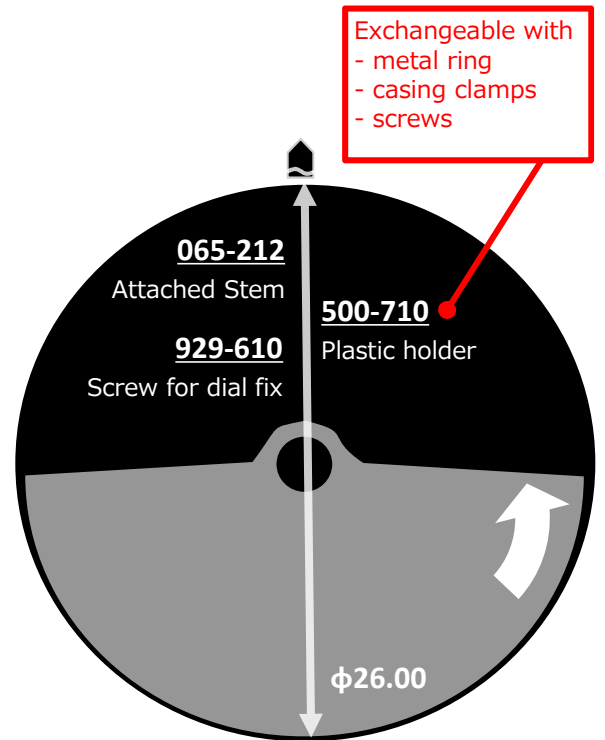

Gilt Version Available


24 24 Hour
 7 Date
 S Small-Second

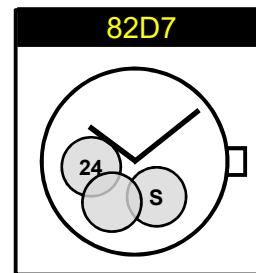

Fine finishing with
 - Hour wheel guard
 - barrel bridge



Featured by
Second stop function



Setting the Time

Time measurement & Winding





Mechanical

Accuracy

Measure within lapse of 10 ~ 60 minutes from full winding with ① posture.

Posture difference

Measure accuracy in below ① ~ ④ postures.

① Dial side up	①	②	③	④
② 6 o'clock side up				
③ 9 o'clock side up				
④ 3 o'clock side up				

■ **To make full-winded**

90 / 91	Turn the crown 40 times
82 / 8N	Turn the crown 40 times
6T	Turn the crown 20 times

■ **Winding direction**

