

Size
<ligne> **13 1/2''**

Height
<mm> **5.52**


Accuracy
<per Day> **-10~+30 sec**

Posture Difference
(under) **40 sec**

Running time
40 hours

Vibration Frequency
<per Hour> (vibration) **28800**

Clearance
Clearance changes subject to the glass, case structure, and the length of the hand.



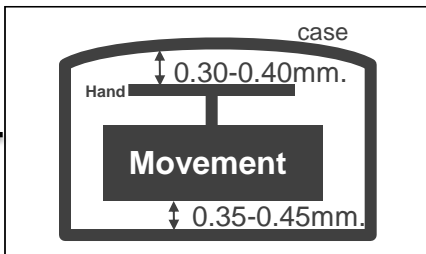


Jewels
26 pcs

Lift Angle
51 degree

Original Package
100 pcs

Exchangeable with the following option parts
- Casing clamps (082-060)
- Screws (924-752)

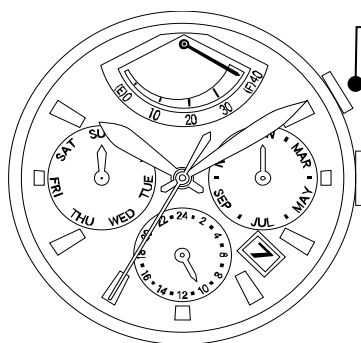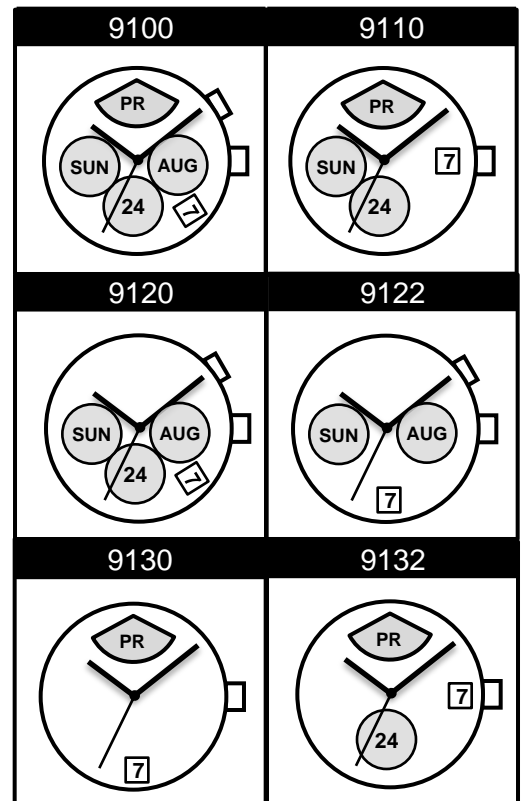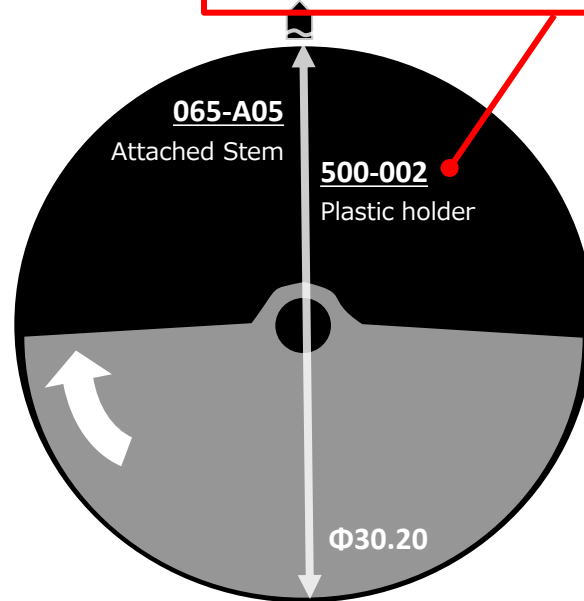

Setting the Month
DO NOT set Month between 10:30pm (31st) - 0:00am(1st)

Setting the Time

Setting the Date and Day
DO NOT set Date between 8:30pm - 2:00am
DO NOT set Day between 11:30pm - 4:00am

Time measurement & Winding





Mechanical

Accuracy

Measure within lapse of 10 ~ 60 minutes from full winding with ① posture.

Posture difference

Measure accuracy in below ① ~ ④ postures.

① Dial side up	①	②	③	④
② 6 o'clock side up				
③ 9 o'clock side up				
④ 3 o'clock side up				

■ **To make full-winded**

90 / 91	Turn the crown 40 times
82 / 8N	Turn the crown 40 times
6T	Turn the crown 20 times

■ **Winding direction**

