



GR12 GR02

| | |
|-------------------------|------------------|
| Size <ligne> | 11 1/2" |
| Height <mm> | 2.71 (GR02 2.94) |
| Accuracy <per Month> | ±20 sec |
| Battery Life | 3 years |


Battery consumption could be minimum by pulling out the stem

| | |
|----------------------------|----------------------------|
| Balance Weight <μN · m> | Minute 0.40 Second 0.09 |
|----------------------------|----------------------------|



Featured by Shock Detection

Clearance

Clearance changes subject to the glass, case structure, and the length of the hand.

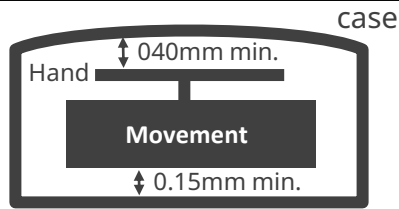

| | |
|------------------|-----------|
| Original Package | 1,000 pcs |
|------------------|-----------|

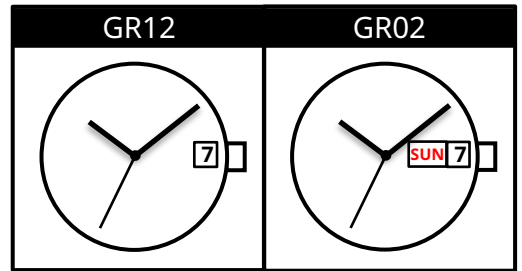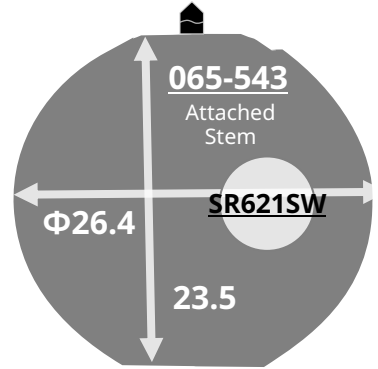


Assembled Hour Wheel
Non Breakable Date Construction
Dust Proof
Covered Coil
Super Quick Date Adjusting
Easy Assembling on Flat Desk

Time measurement

Accuracy

The unit (gate) time of measurement must be set at "10 sec." and the measurement must be performed in the form of complete watch.

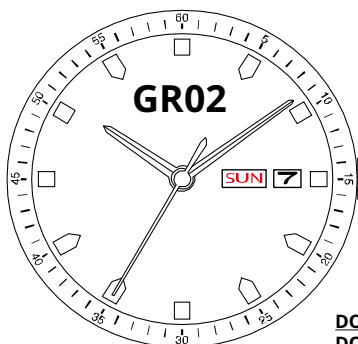

Setting the Time

Setting the Date and Day

DO NOT set Date between 9:00pm - 1:00am
DO NOT set Day between 11:15pm - 6:00am