

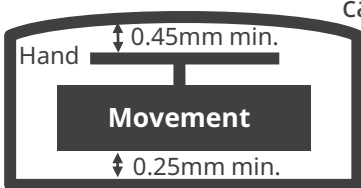
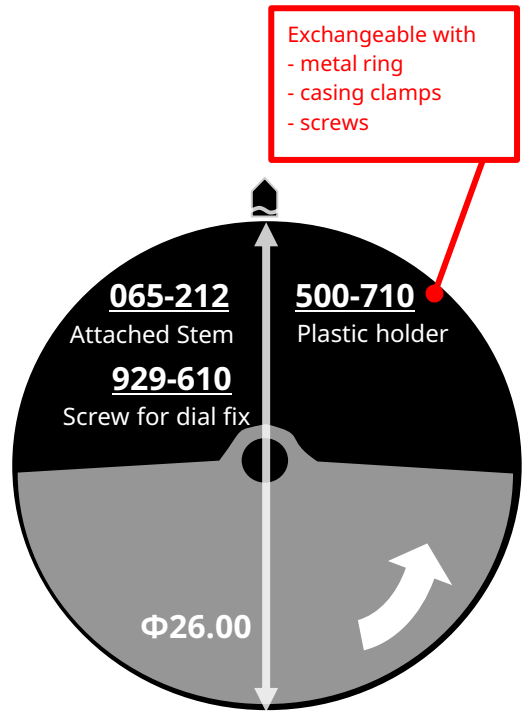


82S0 82S5 82S7

| | |
|-----------------------------------|--|
| Size <ligne> | 11 ½''' |
| Height <mm> | 5.67 |
| Accuracy <per Day> | -20 ~ +40 sec |
| Posture Difference | (under) 50 sec |
| Running Time | (more than) 42 hours |
| Vibration Frequency <per Hour> | (vibration) 21600 |
| Clearance |  <p>Hand \updownarrow 0.45mm min. Movement \updownarrow 0.25mm min.</p> <p>Clearance changes subject to the glass, case structure, and the length of the hand.</p> |
| Jewels | 21 pcs |
| Lift Angle | 49 degree |
| Original Package | 100 pcs |



Gilt Version Available

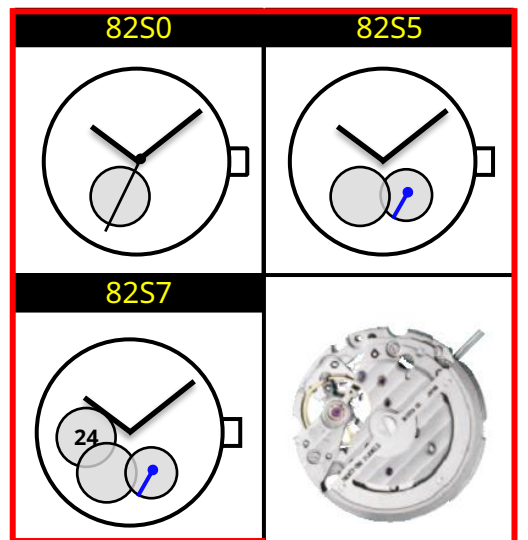

Fine finishing with - barrel bridge

INFORMATION

Time measurement & Winding

Mechanical


Accuracy

Measure within lapse of 10~60 minutes from full winding with ① posture.

Posture difference

Measure accuracy in below ①~④ postures.

- ① Dial side up
- ② 6 o'clock side up
- ③ 9 o'clock side up
- ④ 3 o'clock side up

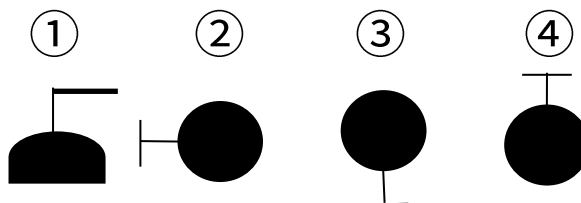

■ To make full-winded

| | |
|---------|-------------------------|
| 90 / 91 | Turn the crown 40 times |
| 82 / 8N | Turn the crown 40 times |
| 6T | Turn the crown 20 times |

■ Winding direction

