





8315

| | |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Size <ligne> | 11 ½" |
| Height <mm> | 5.67 |
| Accuracy <per Day> | -20 ~ +40 sec |
| Posture Difference | (under) 50 sec |
| Running Time | (approximately) 60 hours |
| Vibration Frequency <per Hour> | (vibration) 21600 |
| Clearance | <div> <div>case</div> <div> <div>Hand</div> <div>0.45mm min.</div> <div>Movement</div> <div>0.25mm min.</div> </div> </div> <p>Clearance changes subject to the glass, case structure, and the length of the hand.</p> |
| Jewels | 21 pcs |
| Lift Angle | 49 degree |
| Original Package | 100 pcs |

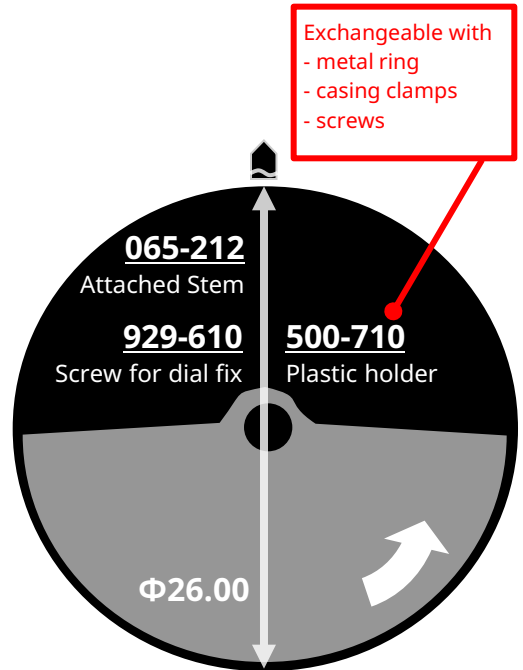


Gilt Version Available

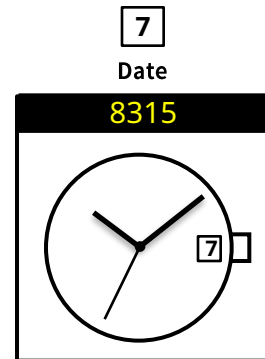

Fine finishing with -
barrel bridge

Blue screws;
Oscillating weight
Barrel bridge
Balance cock complete

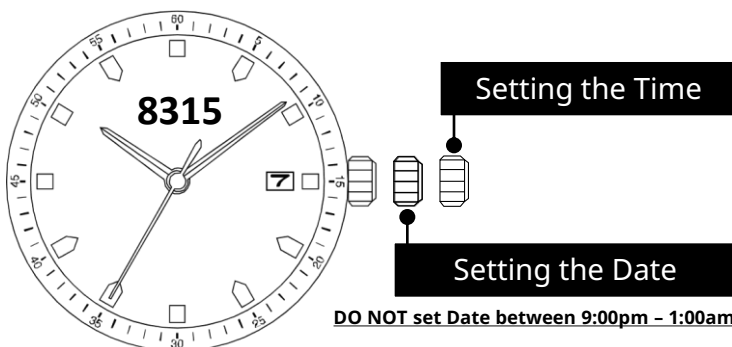



INFORMATION

Time measurement & Winding

Mechanical


Accuracy

Measure within lapse of 10~60 minutes from full winding with ① posture.

Posture difference

Measure accuracy in below ①~④ postures.

- ① Dial side up
- ② 6 o'clock side up
- ③ 9 o'clock side up
- ④ 3 o'clock side up

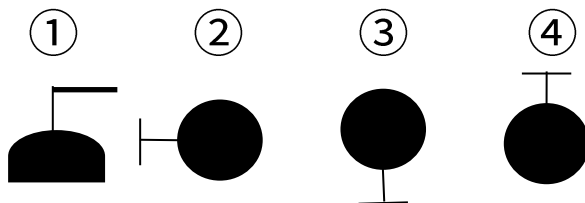

■ To make full-winded

8315

Turn the crown 51 times

■ Winding direction

