2115 2105

MIYOTA

Size <ligne>	10 ½'''
Height <mm>	4.15
Accuracy <per Month>	±20 sec
Battery Life	3 years
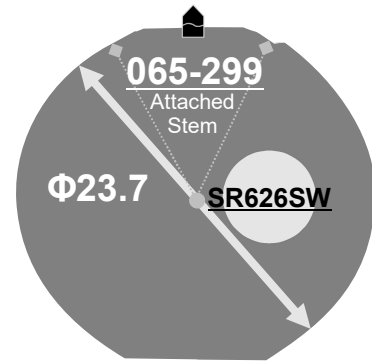
Battery consumption could be minimum by pulling out the stem

Balance Weight <µN.m>	Minute 0.40 Second 0.09

Featured by Shock Detection

Clearance

Clearance changes subject to the glass, case structure, and the length of the hand.

case
Hand
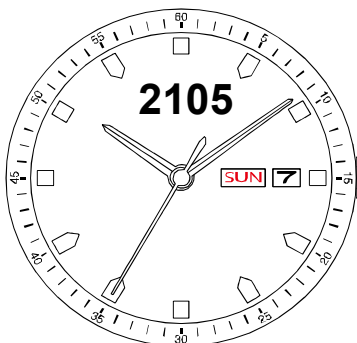0.30-0.45mm.
Movement
0.15mm.

Original Package 1,000pcs

065-299
Attached Stem
Φ23.7
SR626SW

SUN	7
Day	Date

2115	2105
7	SUN 7
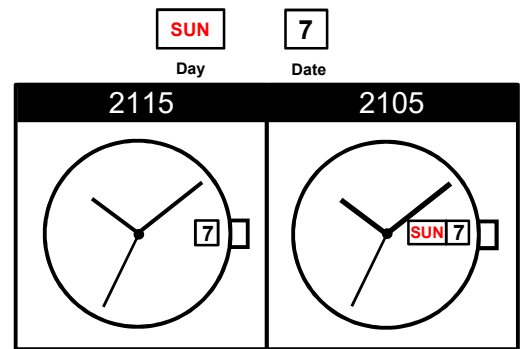
Time measurement

Accuracy

The unit (gate) time of measurement must be set at "10 sec."
and the measurement must be performed in the form of complete watch.

| 10 sec | 10 sec | 10 sec |

2105

SUN 7

Setting the Time

Setting the Date and Day

DO NOT set Date between 9:00pm – 1:00am
DO NOT set Day between 11:15pm – 6:00am