
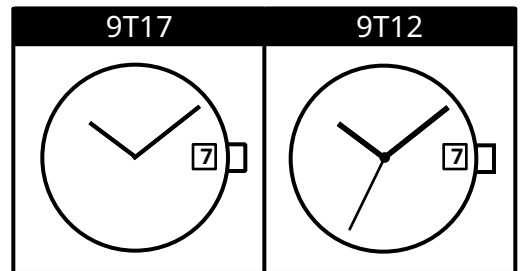
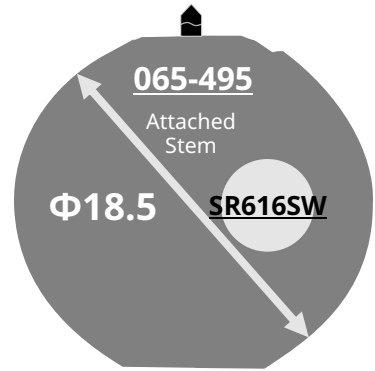


## 9T17 9T12

Size <ligne>	6 ¾ x 8'''
Height <mm>	2.38
Accuracy <per Month>	± 20 sec
Battery Life	2 years

Battery consumption could be minimum by pulling out the stem

Balance Weight <µN · m>	Minute 0.40 Second 0.07 (Except 9T17)
Clearance Clearance changes subject to the glass, case structure, and the length of the hand.	 <p>case</p> <p>Hand</p> <p>± 0.3mm min.</p> <p>Movement</p> <p>± 0.15 ~ 0.30mm</p>
Original Package	1,000 pcs




<Battery Detector Function>  
As warning second hand steps every 2 seconds  
When battery becomes nearly empty.  
(except for Cal. 9T25/17&9U17)

### Time measurement

#### Accuracy

The unit (gate) time of measurement must be set at "10 sec."  
and the measurement must be performed in the form of complete watch.

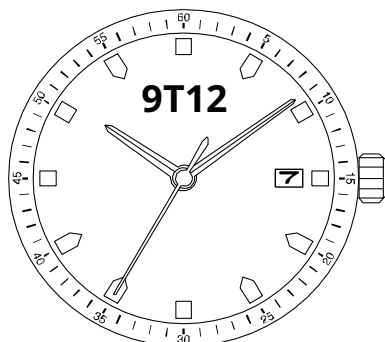

Setting the Time

Setting the Date

**DO NOT set Date between  
9:00pm - 1:00am**