

82S0 82S5 82S7



Size
<ligne> 11 1/2'''


Height
<mm> 5.67

Accuracy
<per Day> -20 ~ +40 sec

Posture Difference
(under) 50 sec

Running time
(more than) 42 hours


Vibration Frequency
<per Hour> (vibration) 21600

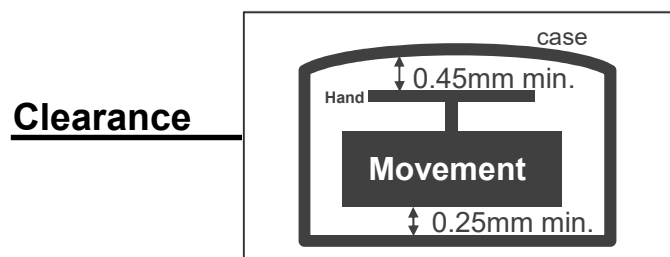


Jewels 21 pcs

Lift Angle 49 degree


Original Package 300 pcs

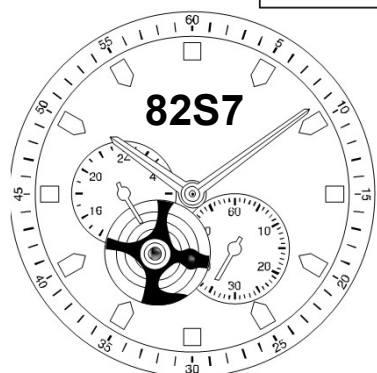

Setting the Time

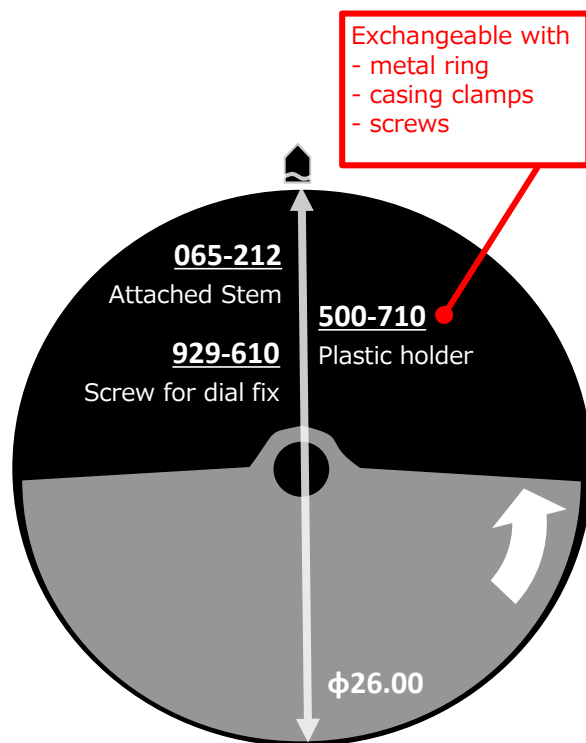

Gilt Version Available

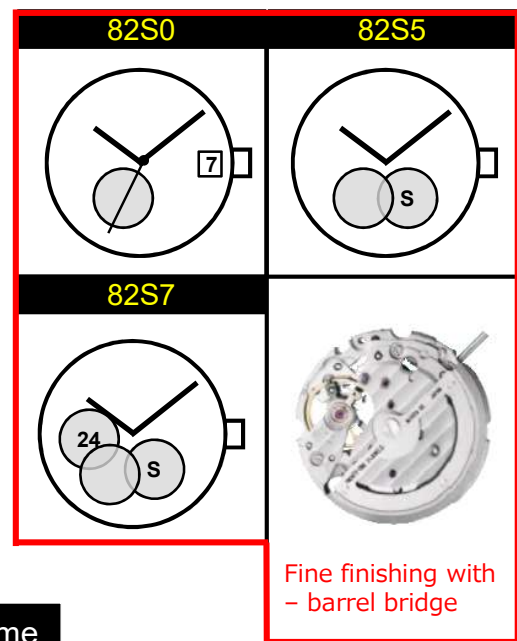

Time measurement & Winding





Mechanical

Accuracy

Measure within lapse of 10 ~ 60 minutes from full winding with ① posture.

Posture difference

Measure accuracy in below ① ~ ④ postures.

① Dial side up	①	②	③	④
② 6 o'clock side up				
③ 9 o'clock side up				
④ 3 o'clock side up				

■ **To make full-winded**

90 / 91	Turn the crown 40 times
82 / 8N	Turn the crown 40 times
6T	Turn the crown 20 times

■ **Winding direction**

