

Size
<ligne> **13 1/2''**

Height
<mm> **5.52**


Accuracy
<per Day> **-10~+30 sec**

Posture Difference
(under) **40 sec**

Running time
40 hours

Vibration Frequency
<per Hour> (vibration) **28800**

Clearance
Clearance changes subject to the glass, case structure, and the length of the hand.



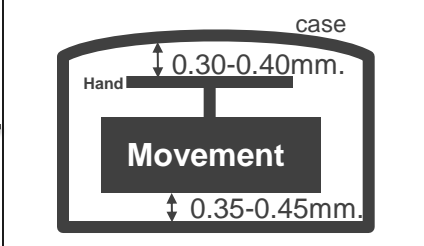


Jewels
26 pcs

Lift Angle
51 degree

Original Package
100 pcs

Exchangeable with the following option parts
- Casing clamps (082-060)
- Screws (924-752)

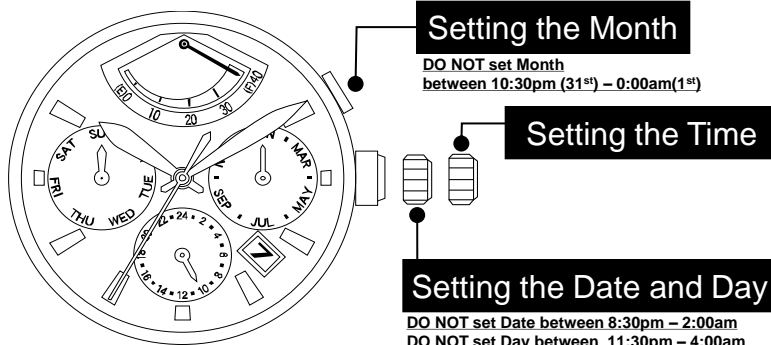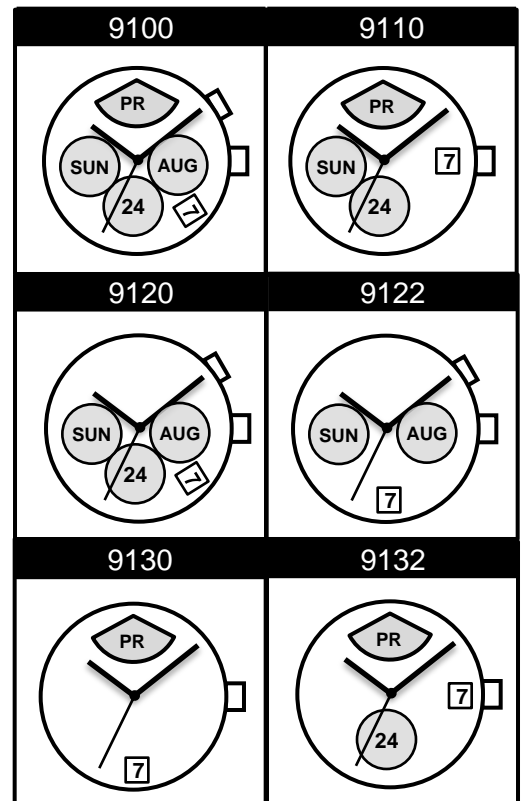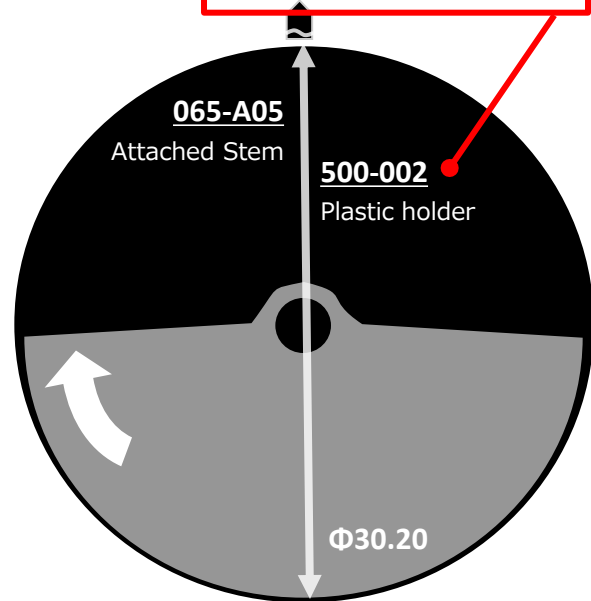

Time measurement & Winding





Mechanical

Accuracy

Measure within lapse of 10 ~ 60 minutes from full winding with ① posture.

Posture difference

Measure accuracy in below ① ~ ④ postures.

| | | | | |
|---------------------|---|---|--|---|
| ① Dial side up | ① | ② | ③ | ④ |
| ② 6 o'clock side up |  |  |  |  |
| ③ 9 o'clock side up | | | | |
| ④ 3 o'clock side up | | | | |

■ **To make full-winded**

| | |
|---------|-------------------------|
| 90 / 91 | Turn the crown 40 times |
| 82 / 8N | Turn the crown 40 times |
| 6T | Turn the crown 20 times |

■ **Winding direction**

