

8315

MIYOTA

Size
<ligne> 11 1/2'''


Height
<mm> 5.67

Accuracy
<per Day> -20~+40 sec

Posture
Difference (under) 50 sec

Running
time (more than) 60 hours

Vibration
Frequency (vibration) 21600
<per Hour>



Clearance


Jewels 21 pcs

Lift
Angle 49 degree


Original
Package 100 pcs

Exchangeable with
- metal ring
- casing clamps
- screws

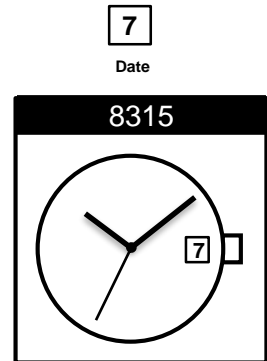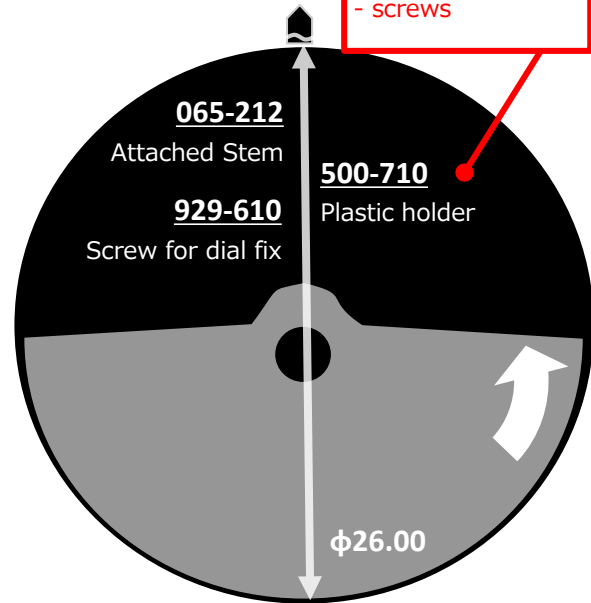

Fine finishing with
- barrel bridge

Blue screws;
Oscillating weight
Barrel bridge
Balance cock complete

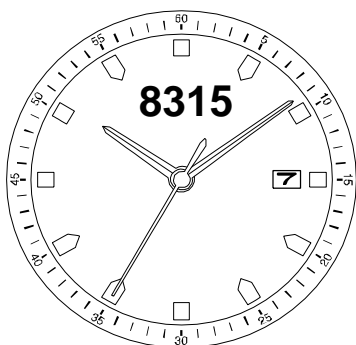

Setting the Time

Setting the Date and Day

DO NOT set Date between 9:00pm - 1:00am

Time measurement & Winding

Mechanical


Accuracy

Measure within lapse of 10 ~ 60 minutes from full winding with ① posture.

Posture difference

Measure accuracy in below ① ~ ④ postures.

- ① Dial side up
- ② 6 o'clock side up
- ③ 9 o'clock side up
- ④ 3 o'clock side up

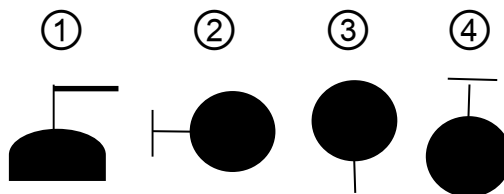

■ To make full-winded

8315

Turn the crown 51 times

■ Winding direction

