




| | |
|--------------------------------|---------|
| Size <ligne> | 12 ½''' |
| Height <mm> | 4.30 |
| Accuracy <per Month> | ±20 sec |
| Battery Life | 2 years |

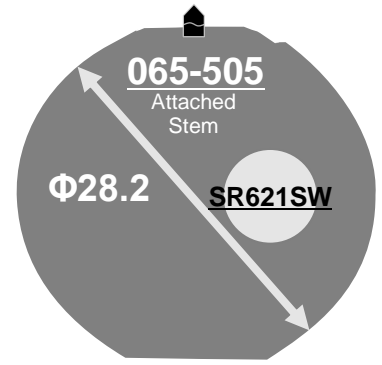

Battery consumption could be minimum by pulling out the stem

| | |
|---------------------------------|--|
| Balance Weight <µN.m> | Minute 0.40 Second 0.09 Small 0.02 |
|---------------------------------|--|



Featured by Shock Detection

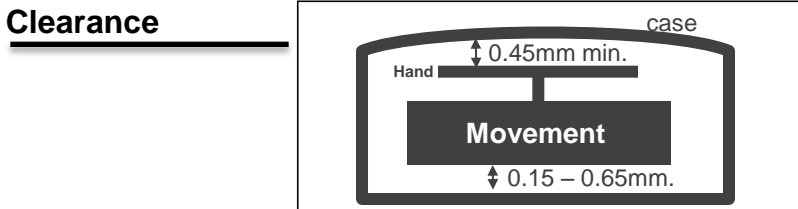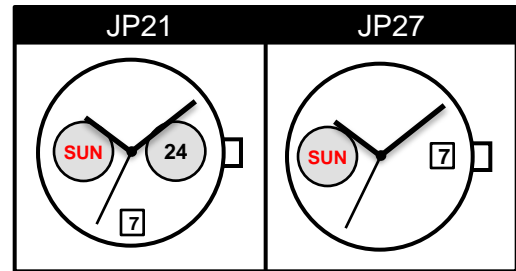

| | |
|-------------------------|--------|
| Original Package | 500pcs |
|-------------------------|--------|

Time measurement

Accuracy
The unit (gate) time of measurement must be set at "10 sec." and the measurement must be performed in the form of complete watch.

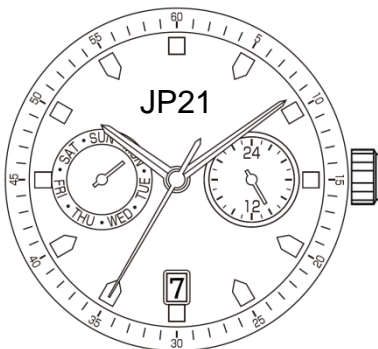

DO NOT set Date between 9:00pm - 1:00am