
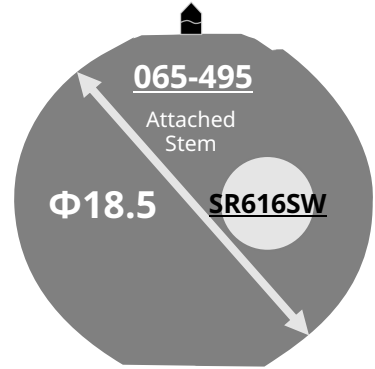


9T15 9T13


Size <ligne>	6 ¾ x 8'''
Height <mm>	2.33
Accuracy <per Month>	± 20 sec
Battery Life	2 years

Battery consumption could be minimum by pulling out the stem

Balance Weight <μN · m>	Minute 0.40 Second 0.07 (Except 9T15)
Clearance Clearance changes subject to the glass, case structure, and the length of the hand.	 <p>case</p> <p>Hand</p> <p>0.3mm min.</p> <p>Movement</p> <p>0.15 ~ 0.30mm</p>
Original Package	1,000 pcs



7
Date

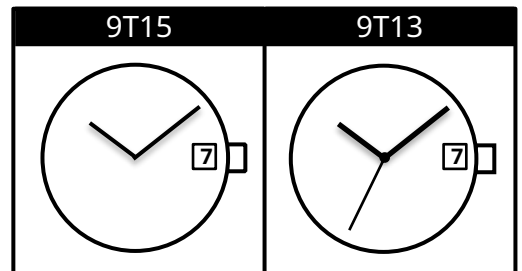

<Battery Detector Function>
As warning second hand steps every 2 seconds
When battery becomes nearly empty.
(except for Cal. 9T22/15&9U15)

Time measurement

Accuracy

The unit (gate) time of measurement must be set at "10 sec."
and the measurement must be performed in the form of complete watch.

