


8215 8205 821A 820A



Size <ligne>	11 1/2'''
Height <mm>	5.67
Accuracy <per Day>	-20 ~ +40 sec
Posture Difference	(under) 50 sec
Running time	(more than) 42 hours
Vibration Frequency <per Hour>	(vibration) 21600

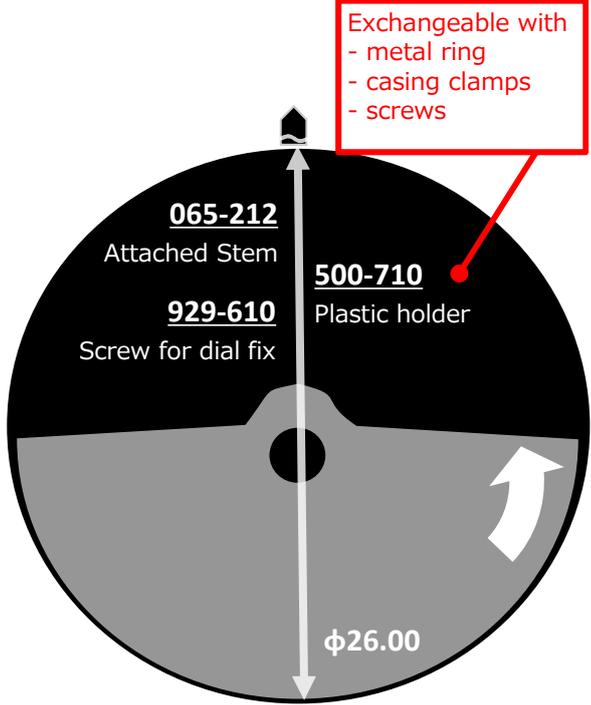


Gilt Version Available



Clearance	
Jewels	21 pcs
Lift Angle	49 degree
Original Package	100 pcs

8215	821A
8205	820A

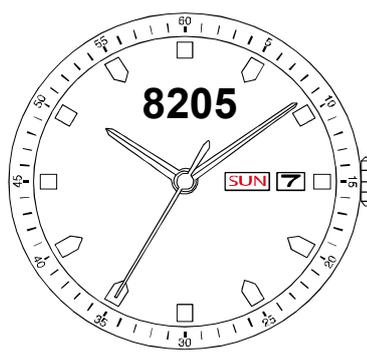

Setting the Time

Setting the Date and Day

DO NOT set Date between 9:00pm - 1:00am
DO NOT set Day between 1:00am - 4:30am

Time measurement & Winding


Mechanical

Accuracy

Measure within lapse of 10 ~ 60 minutes from full winding with ① posture.

Posture difference

Measure accuracy in below ① ~ ④ postures.

① Dial side up	①	②	③	④
② 6 o'clock side up				
③ 9 o'clock side up				
④ 3 o'clock side up				

■ **To make full-winded**

90 / 91	Turn the crown 40 times
82 / 8N	Turn the crown 40 times
6T	Turn the crown 20 times

■ **Winding direction**

