



GL22 GL32


Size <ligne>	6 ¾ x 8'''
Height <mm>	2.28
Accuracy <per Month>	± 20 sec
Battery Life	5 years (GL32 3 years)

Battery consumption could be minimum by pulling out the stem

Balance Weight <µN·m>	Minute 0.40 Second 0.09 (Except GL22)
--------------------------	--

Featured by Shock Detection

Clearance
Clearance changes subject to the glass, case structure, and the length of the hand.


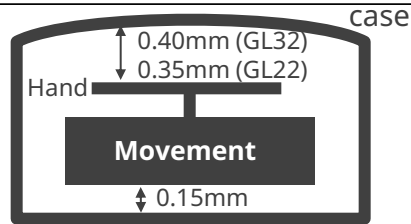


Original Package	1,000 pcs
------------------	-----------

Time measurement


Accuracy

The unit (gate) time of measurement must be set at "10 sec." and the measurement must be performed in the form of complete watch.

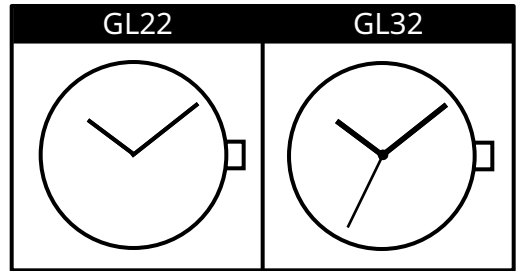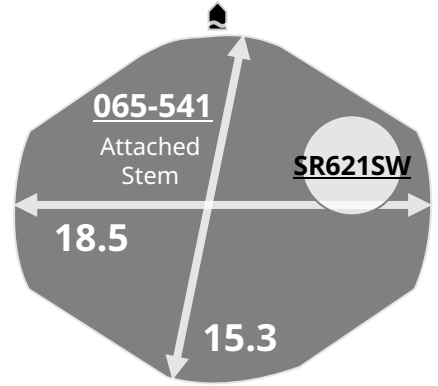

Assembled Hour Wheel
Dust Proof
Covered Coil
Super Quick Date Adjusting
Easy Assembling on Flat Desk

High Hand Ver.
GL24
GL34

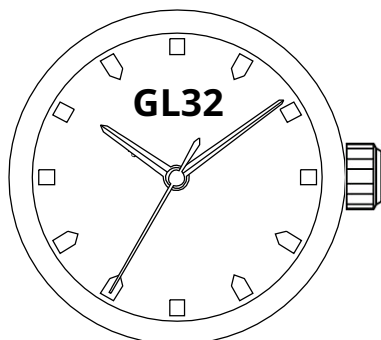

Setting the Time