


# 2025 2035

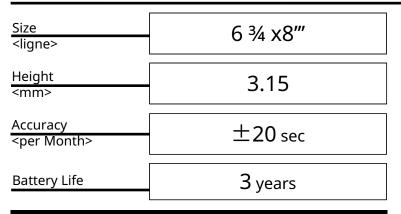

# Battery consumption could be minimum by pulling out the stem

 $\begin{array}{c|c} \textbf{Balance Weight} & \textbf{Minute 0.40} \\ \hline <\mu\text{N}\cdot\text{m}> & \textbf{Second 0.09 (Except 2025)} \end{array}$ 

## Featured by Shock Detection

# Clearance Clearance changes subject to the glass, case structure, and the length of the hand. Clearance changes subject to the glass, case structure, and the length of the hand.


Original Package 1,000 pcs

### Time measurement


## Accuracy

The unit (gate) time of measurement must be set at "10 sec." and the measurement must be performed in the form of complete watch.

10 sec 10 sec







High Hand Ver. 2026 2036 2039 203A

