

<b>Size</b> <ligne>	13 ½”
<b>Height</b> <mm>	4.68
<b>Accuracy</b> <per Month>	±20 sec
<b>Battery Life</b>	2 years




\*12 hours chronograph & 15 seconds alarm operation per day

Battery consumption could be minimum by pulling out the stem

<b>Balance Weight</b> <µN.m>	Minute 0.40 Chrono Second 0.035 Small 0.02 Alarm Hand Small 0.35
---------------------------------	---

<b>Clearance</b>	<p>Hand ↔ 0.30-0.45mm. ↔ case</p> <p>Movement ↔ 0.20-0.40mm.</p>
------------------	--

<b>Original Package</b>	500pcs
-------------------------	--------

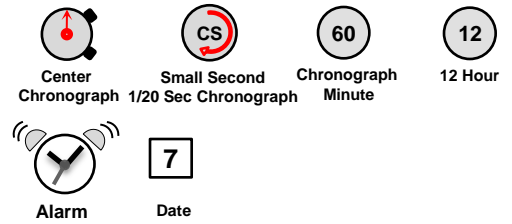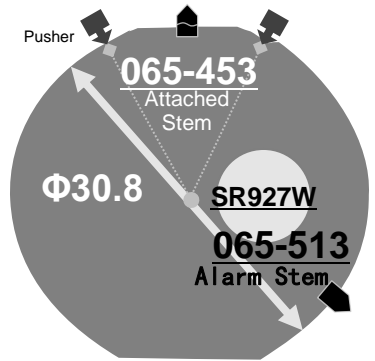

## Alarm

The alarm will sound when the hour hand aligns with the alarm hand.

Sounding 15 Sec.	No Sounding 165 Sec.
---------------------	-------------------------

3 Minutes x Several times

## Time measurement

### Accuracy

The unit (gate) time of measurement must be set at "10 sec." and the measurement must be performed in the form of complete watch.



**Alarm ON/OFF**  
Pull out Button "C" to set the alarm ON. Push Button "C" to return it OFF.

**Button "C"**

**Push "A"**  
Start and Stop the chronograph

**Setting the Time**  
**Set CHRONOGRAPH hands to reset**

**Push "B"**  
Reset the chronograph

**Setting the Date & Alarm**  
DO NOT set Date between 9:00pm - 1:00am

Push A to reset the hands position to the ZERO position. And continue to push A to put them forward