

# 8N40

# MIYOTA

**Size**  
<ligne> 11 ½'''

**Height**  
<mm> 5.55


**Accuracy**  
<per Day> -20 ~ +40 sec

**Posture Difference**  
(under) 50 sec

**Running time**  
42 hours

**Vibration Frequency**  
<per Hour> (vibration) 21600


**Clearance**  
Clearance changes subject to the glass, case structure, and the length of the hand.

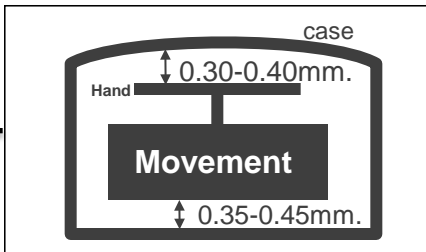



**Jewels**  
21 pcs

**Lift Angle**  
49 degree

**Original Package**  
300 pcs

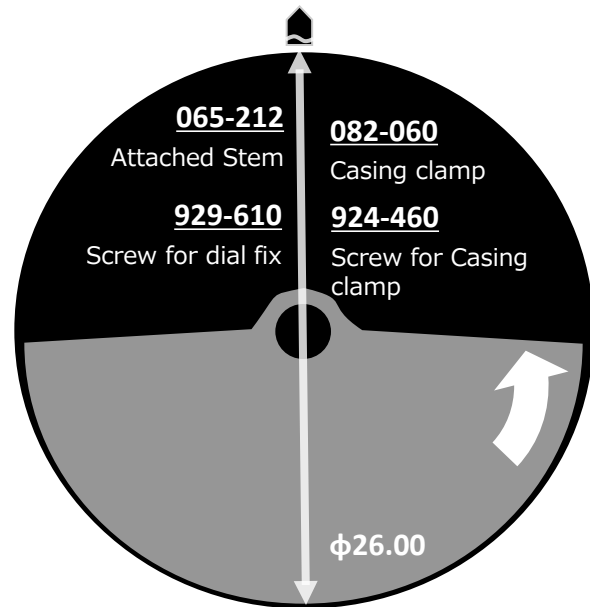

Gilt Version Available

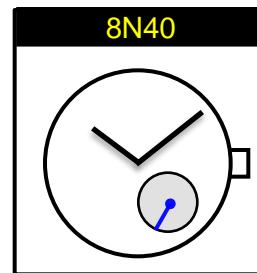

Setting the Time

**Time measurement & Winding**





**Mechanical**

**Accuracy**

Measure within lapse of 10 ~ 60 minutes from full winding with ① posture.

**Posture difference**

Measure accuracy in below ① ~ ④ postures.

|                     |   |   |  |   |
|---------------------|---|---|--|---|
| ① Dial side up      | ①   | ②   | ③  | ④   |
| ② 6 o'clock side up |  |  |  |  |
| ③ 9 o'clock side up |   |   |  |   |
| ④ 3 o'clock side up |   |   |  |   |

■ **To make full-winded**

|         |                         |
|---------|-------------------------|
| 90 / 91 | Turn the crown 40 times |
| 82 / 8N | Turn the crown 40 times |
| 6T      | Turn the crown 20 times |

■ **Winding direction**

