

| | |
|--------------------------------|---------|
| Size <ligne> | 13 ½” |
| Height <mm> | 4.13 |
| Accuracy <per Month> | ±20 sec |
| Battery Life | 2 years |

*60 minutes chronograph operation per day

Battery consumption could be minimum by pulling out the stem




| | |
|---------------------------------|---|
| Balance Weight <µN.m> | Minute 0.40 Chrono Second 0.11 Small 0.02 |
|---------------------------------|---|

Featured by Shock Detection

| | |
|------------------|--|
| Clearance | |
|------------------|--|

Clearance changes subject to the glass, case structure, and the length of the hand.



| | |
|-------------------------|--------|
| Original Package | 500pcs |
|-------------------------|--------|

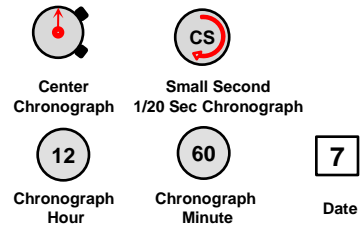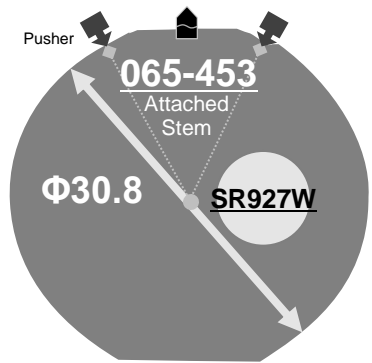

Time measurement

Accuracy

The unit (gate) time of measurement must be set at "10 sec." and the measurement must be performed in the form of complete watch.

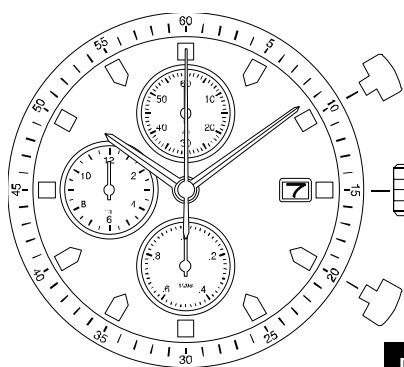

Push "A" Start and Stop the chronograph

Setting the Time

Set CHRONOGRAPH hands to reset

Setting the Date

Push "B" Reset the chronograph

DO NOT set Date between 9:00pm - 1:00am

Push A to reset the hands at the zero position. And continue to push A to put them forward