




Cal. 6S00 Instruction manual

CHRONOGRAPH GRANDE with DAY/DATE

【Displays and Buttons】

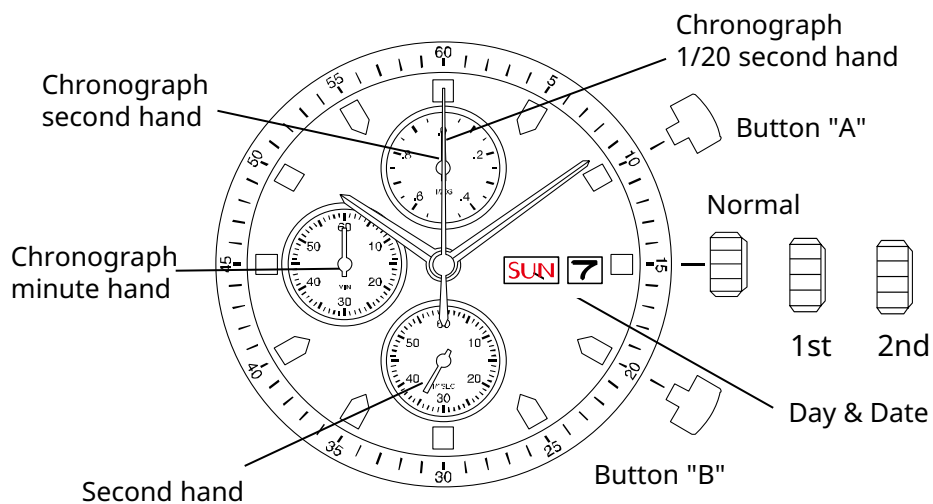

A) SETTING THE TIME

1. Pull the crown out to the 2nd Click Position.
2. Turn the crown clockwise to set hour and minute hands.
3. After the time has been set, push the crown back to the Normal position.

B) SETTING THE DATE

1. Pull the crown out to the 1st Click Position.
2. Turn the crown clockwise to set the date.
 - * If the date is set between the hours of around 9:00 PM and 1:00 AM, the date may not change on the following day.
3. After the date has been set, push the crown back to the Normal position.

C) SETTING THE DAY

1. Pull the crown out to the 1st Click Position.
2. Turn the crown anti-clockwise to set the day.

* If the day is set between the hours of around 11:15 PM and 6:00 AM, the day may not change on the following day.

3. After the day has been set, push the crown back to the Normal position.


D) USING THE CHRONOGRAPH

This chronograph is able to measure and display time in 1/20 second united up to maximum of 59min 59sec.

The chronograph 1/20 second hand keeps continuously for 30 seconds after starting, and then stops at Zero position.

【Measuring time with the stopwatch】

1. Press button " A " to start the chronograph.
2. The chronograph can be started and stopped each time button "A" is pressed.
3. Press button "B" to reset the chronograph and chronograph minute and second hands return to their Zero positions.

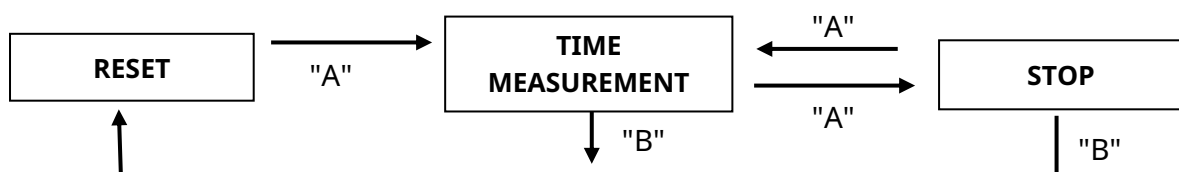

E) CHRONOGRAPH RESET (INCL. AFTER REPLACING BATTERY)

This procedure should be performed when the chronograph second hand does not return to the Zero position.

1. Pull the crown out to the 2nd Click Position.
2. Press the button "A" once to set the chronograph second hand to the Zero position.
3. Press the button "B" once to set the chronograph 1/20 second hand to the Zero position.
 - * The chronograph hands can be advanced rapidly by continuously pressing button "A" or "B".
4. Once the hands been set at Zero position, reset the time and return the crown to its normal position.

These specifications might be changed without prior notice.